

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>B65G 35/00</b>		A1	(11) International Publication Number: <b>WO 97/38928</b>
			(43) International Publication Date: 23 October 1997 (23.10.97)
(21) International Application Number: PCT/GB97/01081		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 18 April 1997 (18.04.97)			
(30) Priority Data: 9608088.2 18 April 1996 (18.04.96) GB			
(71) Applicant (for all designated States except US): SCOOTABOUT INTERNATIONAL LIMITED [GB/GB]; Stable Court, Oakley, Market Drayton, Shropshire TF9 4AG (GB).			
(72) Inventor; and		Published	
(75) Inventor/Applicant (for US only): JEPHCOTT, David, Lynton [GB/GB]; High Trees, Newcastle Road, Ashley Heath, Market Drayton, Shropshire TF9 4PH (GB).		With international search report.	
(74) Agent: POWELL, Timothy, J.; Eric Potter Clarkson, St. Mary's Court, St. Mary's Gate, Nottingham NG1 1LE (GB).		Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	

(54) Title: A METHOD AND APPARATUS FOR TRANSFERRING DRIVE

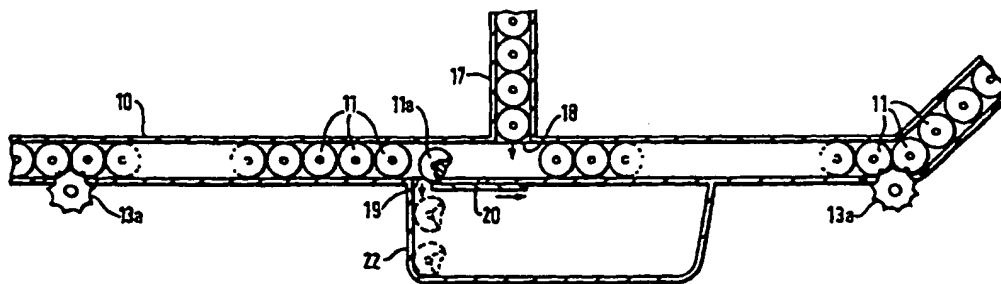

(57) Abstract

This invention relates to a drive-transferring apparatus having a constraining guide (10) carrying a plurality of drive-transferring members (11) interconnected compressively. Drive members (13) drive the drive-transferring members (11) about the constraining guide (10). One or more elongate apertures such as slots (13) permit access to the drive-transferring members for connection of further members thereto; and for reading of data carried by the drive-transferring members (11) or by members connected thereto.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

## A METHOD AND APPARATUS FOR TRANSFERRING DRIVE

This invention relates to a method and apparatus for transferring drive.

5 For many years it has been known to transfer drive by means of direct, permanent mechanical interconnections. An example of such an interconnection occurs when the output shaft of a motor is coupled directly to the member that the motor is intended to drive.

10 However, in many branches of industry it is commonly required to transfer objects over comparatively large distances and to apply drive at locations remote from eg a motor. It therefore is well known to employ drive-transferring apparatuses such as belts, chains and gear trains in order to achieve these aims.

15

However, all known drive-transferring technologies are associated with significant disadvantages.

For example, drive belts and drive chains rely on the imparting of tensile  
20 forces in order to transfer drive. In drive belts, the use of such forces causes gradual stretching of the belts. Similar effects are observed in drive chains over time.

Prolonged use of belts and chains leads to failure, as a result of friction  
25 and wear in the belt/chain members. Failure of a drive belt usually necessitates replacement of the entire belt; or at best a repair that significantly reduces the performance of the belt. Some belt and chain failures are dangerous, especially when fragments of such members are thrown from an apparatus at speed.

30

It is possible to replace individual links of a drive chain, but this is often a time-consuming process. Hitherto it has not been possible to automate the repair of a broken link in a drive chain.

- 5 Gear trains do not suffer from the same disadvantages as belts and chains; however, they are still prone to wear; they are expensive to manufacture; and they generally require permanent installations including bearings secured to fixed datum points. Also, gear trains generally employ only rigid members and hence they lack some of the versatility inuring to belts  
10 and chains, that employ flexible members.

According to the invention in a broad aspect there is provided a drive-transferring apparatus comprising a constraining guide defining a drive-transfer path; and a plurality of drive-transferring members movably  
15 captive in the constraining guide; wherein

- (i) the constraining guide includes one or more apertures permitting access to one or more of the drive-transferring members; and
- (ii) the drive-transferring members are capable of transferring drive between discrete parts of the constraining guide by means of  
20 compressive interconnections.

This apparatus overcomes at least some of the disadvantages of the prior art.

- 25 In particular, the transferring of drive by compressive interconnection means that tensile failure of components of the apparatus is most unlikely to occur. Furthermore, the use of compressive interconnection means that the drive-transferring members need not be permanently connected together. This in turn means that individual drive-transferring members  
30 can readily be repaired or replaced in the apparatus, thereby obviating the

difficulties associated with repair of drive belts and drive chains.

The failure modes of apparatuses according to the invention are safer than in the prior art. This is partly because the constraining guide can be  
5 designed substantially to enclose all the moveable parts of the device. Thus, component failure may be contained safely within the constraining guide, even when the apparatus is operating at high speed.

Additionally, the use of compressive interconnection means that parts of  
10 the apparatus are less likely to be thrown outwardly of the apparatus during failure.

The use of compressive interconnection also means that the drive-transferring elements can be made of materials and shapes inherently  
15 resistant to wear and damage yet which also are associated with low frictional forces, thereby improving the efficiency of the apparatus. Particularly suitable shapes for the drive-transferring members are spherical and spheroidal shapes.

20 All the components of the apparatus of the invention may if desired be manufactured from rigid materials. Thus, it is possible to produce a drive-transferring apparatus that is versatile in terms of the locations between which drive may be transferred; yet which does not suffer from the known disadvantages of flexible drive-transferring members such as  
25 belts and chains.

Another possibility is for e.g. the constraining guide to be flexible. This confers versatility on the apparatus of the invention. One preferred form of flexible constraining guide is a hose-like construction that may be  
30 formed into a variety of shapes while permitting movement of the drive-

transferring members in the manner defined above.

Further, advantageous features of the invention are set out in claims 2-91 appended hereto.

5

In another broad aspect, the invention is considered to reside in a method of transferring drive comprising imparting motion to one or more of a plurality of drive-transferring members loosely captive in a constraining guide, whereby to cause compressive interconnection of a plurality of said members and thereby transfer drive in the constraining guide.

10

There now follows a description of preferred embodiments of the invention, by way of example, with reference being made to the accompanying drawings in which:

15

Figure 1 is a schematic representation of a first embodiment of the invention;

Figure 2 shows an optional branch in the constraining guide visible in Figure 1;

Figure 3 shows part of the Figure 1 embodiment in more detail;

20

Figure 4 is a variant on the Figure 3 arrangement;

Figure 5 shows one form of multiple branching of the constraining guide visible in eg. Figure 1;

Figure 6 shows an arrangement for lubricating part of the Figure 1 embodiment;

25

Figure 7 is a variant on the Figure 6 arrangement;

Figure 8 shows some further optional features of the invention;

Figure 9 shows the apparatus of the invention configured for garment distribution;

Figures 10a-10f show various embodiments of the constraining guide;

30

Figure 11 shows an apparatus for controlling drive-transferring members at a junction;

Figures 12a and 12b show an alternative form of the constraining guide;

5 Figure 13 shows a three-dimensional array of constraining guides installed in a warehouse;

Figures 14a, 14b, 14c and 14d show arrays of constraining guides in vehicles;

10 Figures 15a and 15b show a possible reservoir of drive-transferring members;

Figures 16 and 17 show flat bed conveyors embodying the principles of the invention;

Figures 18 and 19 show typical layouts of conveyors according to the invention;

15 Figures 20a and 20b shows a further vehicle including a three dimensional array of constraining guides;

Figures 21a and 21b show a motor according to the invention;

Figure 22 shows an optional feature of the constraining guide;

Figure 23 shows an embodiment of drive-transferring member; and

20 Figure 24 shows a further embodiment of drive-transferring member.

Referring to the drawings there is shown a constraining guide 10 in the form of tubular member. The tubular member 10 has a hollow, elongate  
25 interior substantially filled with a line of contiguous bead-like drive-transferring members 11. A driven member shown schematically at 13 protrudes through the wall of constraining guide 10 and imparts drive to successive drive-transferring members 11. This causes drive to be transferred along the constraining guide 10 in a compressive manner.

Driven member 13 protrudes through an aperture in the wall of constraining guide 10. A similar aperture may be provided at a location remote from driven members 13, whereby drive may be taken from the apparatus if desired. Apertures may be formed in the wall of constraining guide 10 at virtually any desired location. The apertures may, if desired,  
5 be closable eg by means of automatic or manually operated closures. One form of closure is described below in relation to a drive-transferring member ejection apparatus.

10 The driven member 13 may be a star wheel as shown schematically in Figure 1, or may be a drive screw. Numerous other, equivalent arrangements may also be employed for imparting linear motion to the drive-transferring members 11. Nonetheless, a driven member 13 that converts rotary motion (eg from an electric motor) to linear motion is  
15 preferred.

As is evident in Figures 3 and 4, constraining guide 10 may include an elongate slot 13. This permits access to one or more of the drive-transferring members 11 along a lengthy portion of the constraining guide  
20 10. This in turn permits one or more further members to be engaged with the line of contiguous members 11, thereby giving rise to a transport apparatus.

In the Figure 3 embodiment, the constraining guide 10 is generally rectangular in cross-section, with the elongate slot 13 formed in one of the  
25 vertical sides of the guide 10. This permits a member such as rod 14 connected to a member 11 to protrude generally horizontally from the apparatus. This in turn permits articles to be carried on the apparatus by means of suspension from rod 14.



If desired, a second constraining guide 10 that is the mirror image of constraining guide 10 shown in Figure 3 may be disposed to provide support at each end of rod 14. It is believed to be desirable, but not essential, for the mirror image constraining guide 10 to contain a plurality  
5 of members such as the drive-transferring members 11. However, such members need not necessarily be driven as in the embodiment of Figure 1, and could under some circumstances be dispensed with entirely so that the further constraining guide serves simply as a support for the otherwise free end of rod 14.

10

In the Figure 4 embodiment, the elongate slot 13 extends along the bottom of a generally circular cross-section constraining guide 10. This permits the carrying of a plurality of hangers 16. This version of the invention may be of utility in the garment manufacturing and/or warehousing  
15 industries.

As is evident from Figures 1, 3 and 4, the drive-transferring members are spheroidal in shape. Thus, they are well suited for transferring drive by means of compressive interaction. Furthermore, the members 11 roll  
20 easily within the guide 10, thereby minimising wear and friction.

However, the members 11 may be of numerous other shapes including completely spherical; cylindrical and even polygonal.

25 In the embodiments of Figures 1, 3 and 4 a plurality or indeed all of the members 11 include an aperture and a detent for securing to a further member such as rod 14 or hanger 16.

Figures 2 and 5 show that the constraining guide 10 may be branched in  
30 a number of ways, whereby to transfer drive to several locations

simultaneously. If necessary, the branch lines of the constraining guide 10 may include further driven members such as member 13a shown schematically in Figure 1. The further driven members may, in common with the driven member 13, take a variety of forms according to the  
5 arrangement of the apparatus.

Figure 1 shows a further branch 17 in the guide 10, for replenishing the guide 10 with members 11. Branch 17 may be constituted as a spring-loaded store of members 11 separated in normal use of the apparatus from  
10 the remainder of guide 10 by a moveable wall shown schematically at 18 in Figure 1. If it is necessary to increase the number of members 11 within the guide 10, the wall 18 may be removed either by an automatic mechanism or manually in order to allow one or more additional members 11 to be dispensed from branch 17 into the main part of guide 10.

15

Figure 1 also shows a closable aperture 19 that may be employed for selectively removing members 11 from the main part of guide 10. This may be required, for example when a member 11a becomes damaged or broken.

20

In the embodiments shown, aperture 19 includes a slidable cover 20 that may be withdrawn to one side to allow the damaged member 11a to fall into a receptacle 22 secured to the underside of constraining guide 10.

25 Instead of a receptacle, the damaged member 11a may enter a conveyor for removing it to a waste receptacle or repair area.

Figure 6 shows an optional portion of guide 10 formed as a downwardly extending curve 10a. This portion of the constraining guide 10 contains  
30 a pool of lubricant 23. Thus, drive-transferring members 11 passing

through the portion of guide 10 shown in Figure 6 automatically receive a coating of lubricant.

Curved portion 10a need not be present if the materials chosen for the components do not require lubrication by immersion in a liquid. For example, the materials of the mutually engaging parts of the drive-transferring members and the constraining guide may be chosen to have a low coefficient of friction. Another possibility is for the drive-transferring members, and/or the relevant parts of the constraining guide to be impregnated, coated or otherwise treated with a lubricant.

Downwardly directed curves 10a may be located at appropriate points along the guide 10 in order to provide lubrication for the members 11 throughout the apparatus. If desired, the portion 10a may be automatically or manually refillable with lubricant, eg by means of suitable apertures.

The drive members 11 may be manufactured from any of a variety of materials. However, it is envisaged that a generally rigid copolymer would be most appropriate in terms of cost and durability. The material of the drive members 11 can be chosen to have a low coefficient of friction with the constraining guide 10.

The guide 10 may typically extruded eg from aluminium or an aluminium alloy; however, a number of other materials, including flexible materials, may also be used.

The sliding cover 20 shown in relation to aperture 19 (which may also be employed on other apertures in the apparatus) may be motorised eg by means of a solenoid actuator itself operated under the control of an optical or other sensor.

The constraining guide 10 is shown in the drawings to be an open-ended elongate device. However, it is most likely that in practical embodiments of the invention the constraining guide 10 would constitute a closed loop whereby to avoid the need for constant replenishment of the members 11.

5 However, in applications where the drive to the transferred is reciprocatory, it may be desirably economical to employ an open-ended constraining guide 10 as shown.

As shown in Figure 7, the constraining guide 10 may be shaped in a  
10 variety of ways to accommodate obstacles, etc. in a warehouse or factory.

The constraining guide 10 may be supported at intervals, eg. by suspenders 24 extending downwardly from the ceiling of a building.

15 The lubricating trough or pool 23 of Figure 6 is also visible in Figure 7. There is, in addition, a bypass path for the constraining guide 10 so that the drive-transferring members 11 need only enter the lubricating trough 23 as necessary. Controlling gates (examples of which are described hereinbelow) may be employed selectively to divert the drive-transferring  
20 members through the lubricating trough 23 as desired.

Figure 8 shows some further ways in which the constraining guide 10 may be formed. As shown at 25a and 25b, the constraining guide may be formed into coils for encircling a further component eg. a sensor for  
25 detecting the presence of the drive-transferring members 11.

The drive member 13a is shown schematically protruding through the wall of constraining guide 10 in Figure 8.

30 Figure 8 also shows a branch 27 in the constraining guide, included for

the purpose of replenishing the constraining guide 10 with drive-transferring members 11 as necessary.

Gate members 28 protruding through the wall of constraining guide 10 in the vicinity of junction 27 are laterally slideable selectively to open and close the junction 27 and thereby allow one or more fresh drive-transferring members 11 to fall into the constraining guide 10.

Similar gate members may be installed at a further junction 29 for the purpose of selectively removing drive-transferring members 11 from constraining guide 10.

A detector of fractures or other failures in the drive-transferring members 11 may be operative at point F in Figure 8 to cause opening of the junction 29 and ejection of drive-transferring members when faults in the drive-transferring members 11 are detected.

Gate members 28 moveable for selective interposing in the paths of the drive-transferring member 11 may also be supplied at branches such as 30. Computer control of the gate members permits guiding of the drive-transferring members along a selected branch of constraining guide 10.

Figure 9 shows a specific example of this form of the invention, in a garment distribution warehouse. A plurality of garment hangers 32 are secured to the drive-transferring members 11 via the elongate slot 13. A junction such as 27 of Figure 8 allows replenishment of drive-transferring members as necessary. A further junction such as 30 allows diverting of the garments to a predetermined destination.

If desired, the drive-transferring members may be encoded as described

in detail below in order to predetermine their path along the constraining guide 10.

5 In the Figures 10, various forms of the constraining guide 10 and drive-transferring member 11 are shown.

In Figure 10a, constraining guide 10 is an elongate, hollow, square section member having an elongate slot in its lower face.

10 In Figure 10b, constraining guide 10 comprises an inner, elongate, hollow tubular member 33 surrounded by an outer such member 34. Elongate slot 13 passes through both tubular members 33 and 34. Thus it is possible to employ drive-transferring members as shown having one or more downwardly projecting portions 35.

15

In the preferred embodiment, the inner tubular member 33 has a low coefficient of friction with the parts of the drive-transferring members 11 with which it is in contact. Outer tubular member 34 is preferably of a rigid material, and as shown in Figure 10c may be armoured or otherwise  
20 strengthened.

The drive-transferring members 11 may in this embodiment comprise a pair of rollers 37 spaced from one another and mounted on a common axle 38. A central member 39 of approximately rectangular shape occupies the  
25 space between the rollers 37. Axle 38 passes through an aperture in central member 39.

Downwardly projecting member 35 is releasably secured to a portion of central member 39 extending a short distance beyond slot 13.

30

Downwardly projecting member 35 includes an aperture for receiving eg. the hook of a garment hanger 32. Downwardly projecting member 35 is encoded eg. by means of a bar code 40, by implanting of a radio frequency identification tag or in another optical, audible or otherwise transmissible manner.

This embodiment of the invention is of particular use during product manufacture and distribution. On manufacture of a garment, it is hung on a hanger 32 the hook of which is inserted into the aperture of a member 35. This member 35 may then remain uniquely associated with the product on hanger 32 during its transport via an apparatus according to the invention to eg. the interior of a lorry, for subsequent distribution to a warehouse or retail unit.

During this process the bar code or other code 40 may be read periodically to ensure correct routing of the drive-transferring member to which the downwardly projecting member 35 is secured. Such routing may be achieved through operation of the gate members 28 described hereinabove in the apparatus of the invention.

When the garment reaches a final or intermediate destination, the downwardly projecting member 35 may be removed from the drive-transferring member. In the embodiment shown this is achieved through use of a slidable dovetail joint, but other methods of releasably securing the downwardly projecting member may also be employed.

After removal of the downwardly projecting member 35, the drive-transferring member 11 to which it was formerly attached may be recycled within the constraining guide for receipt of another downwardly projecting member 35; alternatively the drive-transferring member 11 may be passed

to a reservoir before subsequent use.

Figures 10e and 10f show alternative profiles for the constraining guide 10.

5

Figure 10f also shows a ball and socket joint 35a for connection of the downwardly projecting member 35. Such a joint permits rotation about a vertical axis. This may be of benefit in some manufacturing and distributing environments.

10

In the Figure 10b embodiment, each drive-transferring member 11 includes a radio frequency identification tag 42 that remains secured to the drive-transferring member 11 after removal of the bar coded downwardly projecting member 35 as shown. Such an arrangement permits controlled recycling of the drive-transferring members 11.

15

Figure 11 shows an alternative form of the gate members 28 controlling the flow of drive-transferring members in the constraining guide.

20 In this arrangement the gate 28 comprises a blade 43 slidably mounted via an elongate slot 44 on a pillar 45 itself rigidly secured relative to the constraining guide 10.

A connection member 46 interconnects blade 43 and slot 44.

25

A bar code reader 47 is mounted forwardly of pillar 45 for reading bar codes associated with the drive-transferring members 11. In this case, the drive-transferring members are all spherical and have the relevant bar codes printed on their bodies.

30



The spherical members may be weighted to ensure that the bar codes are correctly oriented.

The blade 43 may be interposed under the action of eg. a solenoid or other motive device when the bar code reader determines that the branch 10 of Figure 11 is to be closed, and that the drive-transferring members are to travel under the influence of a driven member 13 along the branch 10b.

10 The bar code reader 47 may of course be linked to a suitable control device such as a microprocessor.

In Figures 12a and 12b, there is shown an alternative form of the constraining guide. This constraining guide comprises (in the embodiment shown) four rod-like members 50 that extend parallel to one another in a square pattern, to define a comparatively open cage for constraining the drive-transferring members 11 that are again in this embodiment spherical.

In this embodiment the drive-transferring members may respectively be secured to a load support 51 that engages the associated drive-transferring member via the space between two adjacent rod-like members 50. In such an embodiment, the suspender 24 for the constraining guide 10 may encircle the rod-like members 50 as shown and may include one or more apertures 24a, 24b permitting passage therethrough of the support member 51 and any goods 52 supported thereby.

An alternative, downwardly projecting support member 51a is also shown in Figures 12a and 12b. Aperture 24b in suspender 24 accommodates travel of such a member.

In Figure 13, there is shown a three dimensional array of constraining guides 10, installed within a warehouse 54.

Portions 10<sub>1</sub>, 10<sub>2</sub>, 10<sub>3</sub>, 10<sub>4</sub>, etc of the constraining guide 10 are open  
5 ended on one side of the three dimensional array of constraining guides, for receipt of eg. garments or other goods transported by the apparatus of the invention. Such goods may be delivered eg. by lorry or other vehicle from a factory or another distribution centre.

10 The goods transported on the apparatus fed into the array via the open ended portions may be transported to any suitable storage point within the three dimensional array as indicated schematically. If desired, spiral portions 10'' of the constraining guide may be employed to raise or lower goods as desired. The use of such spiral portions brings the goods into  
15 contact with a plurality of further parts of the array.

Crossings of portions of the constraining guide 10 may include junctions such as 27,29 or 30 previously described, in order to provide for routing of individual goods to any preferred location within the array in  
20 dependence on the encoding of such goods.

Further, open-ended portions of the constraining guide 10', etc may be provided in a dispatch area preferably located on the opposite side of the three dimensional array. The goods to be dispatched may be transported  
25 into vehicles such as those shown in Figure 13 for onward dispatch to further distribution centres, retail units or other locations.

A computer control system may be employed to ensure routing of the goods within the three dimensional array, according to encoding of either  
30 the drive-transferring members 11 or members attached thereto. This will

allow significant reductions in staffing levels at warehouses.

Referring now to Figure 14a, a vehicle 55 such as that shown in Figure 13 is shown in greater detail.

5

Vehicle 55 includes formed therein a further three dimensional array of the constraining guides 10. In the embodiment shown, the constraining guides permit vertical movement of intermediate, connecting bars 56 and horizontal movement of such bars along the interior of the vehicle, as  
10 desired.

Two portions 110a and 110b are hingeably secured to the three dimensional array formed within the lorry. The hingeable portions 110a and 110b may be hinged outwardly from an initial, flush position to  
15 protrude from the rear of the vehicle for engagement with the outer, open ended portions 10'<sub>1</sub>, 10'<sub>2</sub>, 10'<sub>3</sub>, 10'<sub>4</sub> of the three dimensional array in the warehousing building 54.

If desired, the hingeable portions 110a, 110b may be secured to or formed  
20 within the rear doors of the vehicle.

Alternatively the portions 110a, 110b may be slideable into and out of the vehicle. In such cases the portions 110a, 110b retain the orientation shown throughout their movements.

25

The free ends of the portions 10'<sub>1</sub>, 10'<sub>2</sub>, etc include gate members 57 that in the embodiment shown are simple pins inserted through aligned holes formed in opposite sides of the constraining guide 10, to prevent the drive-transferring members 11 from falling out of the apertures at the ends of  
30 the constraining guide portions 10'<sub>1</sub>, 10'<sub>2</sub>, etc.

If desired, flexible portions may be included in such parts of the constraining guide to ensure mating of the hingeable portions 110a, 110b with the corresponding junctions defined at the free ends of the constraining guide.

5

The hingeable portion and/or the free ends 10', 10', etc. may if necessary include clips or other means of securing them to the portions of constraining guide that abut them on manoeuvring of the vehicle 55 to a loading or unloading position.

10

Although the arrangement shown in Figure 14a concerns loading of goods onto a vehicle, it will be appreciated that a similar arrangement may be employed for unloading of the vehicle when it reaches its destination.

15 The vehicle 55 may include a microprocessor or other controller device for routing the garments, eg. as supported on the bars 56, within the vehicle in dependence on encoding of the drive-transferring members 11 or further members secured thereto.

20 Such an arrangement may permit organisation of goods within the vehicle as it travels, thereby speeding unloading of goods at the vehicle's destination.

An alternative array of constraining guides in a vehicle 54 is shown in  
25 Figure 14b.

In this arrangement the deck of the vehicle contains a grid-like array of interconnected constraining guides 10, the interconnections including junctions as necessary such as junctions 27, 29 and 30 of Figure 8.

30

Figure 14d shows the floor plan of the vehicle, that optionally includes side doors that permit rapid unloading of the vehicle. The side doors minimise the movement of goods needed within the vehicle to achieve speedy unloading.

5

This arrangement is intended to support a pallet such as pallet 58 of Figure 14c.

Pallet 58 includes a plurality of selectively downwardly moveable members 59 for engagement with selected drive-transferring members 11 in the array of constraining guide 10.

Depending on encoding of either the pallet or the drive-transferring members, the pallet may drivingly engage predetermined drive-transferring member 11 in order to move the pallet within the vehicle.

If desired, one or more grid squares of the array shown in Figure 14b may be left blank to provide room for manoeuvring the pallets within the vehicle.

20

Alternatively, a grid extension 60 (optionally supported on leg 61) of constraining guide members 10 may project from eg. the rear of the vehicle to provide such space for manoeuvring.

Figure 14b also shows an equivalent array of constraining guides 10''' at an upper level within the body of the vehicle 54, for manoeuvring pallets 58 in a second tier within the vehicle.

If desired, the entire array of upper constraining guide 10''' can be height-adjustable on eg. suitable hoist motors within the vehicle 54.

30

The computer control may if desired be operable on the upper tier of drive-transferring members as well.

Furthermore, suitable extensions 60'' may be provided to permit  
5 manoeuvring of the pallets 58 on the upper tier.

As in the embodiment of Figure 14a, the constraining guides 10 of Figures 14b and 14c may if desired be connectable to eg. the free ends 10'<sub>1</sub>, 10'<sub>2</sub>, 10'<sub>3</sub> as shown in Figure 14a.

10

Referring now to Figures 15a and 15b, there is shown a reservoir 63 of encoded drive-transferring members 11 for use in a warehouse, factory or vehicle based environment such as those of Figures 13 to 14.

15 As is shown in detail in Figure 15b, the reservoir 63 is subdivided into a plurality of compartments. Each compartment contains a plurality of drive-transferring members 11 encoded in a predetermined way, eg. to indicate to a control device controlling operation of the apparatus of the invention the destination of goods to be carried by the apparatus. This is  
20 shown schematically in Figure 15a.

A plurality of gate members such as gate members 28 as described hereinabove, may selectively control the feeding of drive-transferring members into the constraining guide 10. This may be achieved eg. in  
25 dependence on intervention by the operator of a garment manufacturing or finishing machine may on completion of each garment indicate the kind of drive-transferring member 11 (in terms of its encoding) to be added to the constraining guide 10, prior to attachment of the garment hanger 32 for the most recently completed garment thereto. In this way, within  
30 seconds of their manufacture or finishing the garments are associated with

drive-transferring members of the apparatus of the invention that are encoded as to their destinations. Such encoding may be carried with the garments throughout their journeys to final destinations, such journeys possibly embracing travel through warehouse-based systems as shown in  
5 Figure 13 and in vehicles such as those of Figures 14.

Referring now to Figure 16, there is shown a flatbed conveyor powered by a pair of constraining guides 10 according to the invention.

10 Flatbed conveyor 63 includes a plurality of horizontal slats or plates 64 secured one adjacent another on a pair of parallel, mutually spaced constraining guides 10 according to the invention.

Each of the slats or plates 64 is slidably engaged on its underside with  
15 one or more of the drive-transferring members 11 of one or both the constraining guides 10 shown in Figure 16.

The slats or plates 64 may be linked together eg. by means of sliding links, or may be mutually disconnected from one another.

20

The key advantage of using constraining guides according to the invention in the Figure 16 embodiment is that the constraining guides may be driven at different speeds from one another when it is required to drive the flatbed conveyor 63 around a bend as shown.

25

A branch 10a of the constraining guide stands at the infeed to the bend negotiated by the outer constraining guide. Constraining guide branch 10a feeds additional drive-transferring members 11 into the constraining guide, in order to permit faster travel of the outer part of the flatbed conveyor in  
30 the vicinity of the bend. At the termination of the bend, a further branch

10b of the constraining guide 10 may remove the excess constraining guides in order to permit the two constraining guides 10 to follow a straight line path at the same speed.

- 5 For the avoidance of doubt, in the Figure 16 embodiment, the flatbed conveyor 63 travels in the direction of the arrows C.

Suitable gates such as gate members 28 may be employed at the junctions between the branch portions 10a and 10b and the main constraining guide  
10 forming the outer part of the curve.

As shown in Figure 17, the slats or plates 64 may be constructed in two portions 64a, 64b. One of the two portions 64a may be hollow for receiving the free end of the other portion 64b of the slat 64. A resilient  
15 connection indicated schematically by spring 65 may permit resilient compression and/or extension of the elongate length of each slat or plate 64. This allows the slats or plates to accommodate changes in the spacing between the two constraining guides 10 visible in Figure 17.

- 20 Thus the apparatus of the invention permits construction firstly of a conveyor that is able to negotiate bends through use of variable speed drives as shown in Figure 16; and secondly of a conveyor the width of which may vary in dependence on the spacing between the pair of constraining guides 10.

25

Hitherto it has not been possible to devise a powered conveyor the width of which varies at different points about its travel.

Figure 18 shows in plan view a typical conveyor layout for use eg. in a  
30 packing area or product finishing area of a factory or warehouse.



The constraining guides 10 are shown schematically, as are the branches 10a and 10b of Figure 16. The slats or plates 64 of the conveyor are omitted from Figure 18 for clarity.

- 5 A further layout of constraining guide members 10 is shown in Figure 19. In this figure there is a main constraining guide loop 10 driven by a main drive member 13 driven by a motor (not visible in Figure 19).

- 10 A branch loop 10c may selectively divert drive-transferring members 11 from the main loop 10 and may pass through eg. a protective wall 66 into a hazardous area, a clean room, or other processing area 67 to which human access is normally denied.

- 15 In the embodiment shown, there is a single constraining guide (as compared with the parallel pair of constraining guides of eg. Figure 18), that in the processing area 67 passes about the periphery of a rotatable table or dais 68. Contact of the drive-transferring members of the branch loop constraining guide 10c with a suitable surface formed in the periphery of the rotatable dais 68 may cause driven rotation thereof. If  
20 necessary, a further driven member represented schematically at 13c may be provided to power the drive-transferring members around the branch loop 10c to achieve this.

- 25 The drive-transferring members 11 may transfer their drive in other ways as desired within the processing area 67.

Referring now to Figure 20a, there is shown a vehicle comprising a framework 70 constituted predominantly of constraining guides 10 of apparatus according to the invention.

The constraining guides 10 of the framework 70 are in the embodiment shown each formed as parallel, mutually spaced polygonal shapes rigidly interconnected by struts 71 disposed at intervals about the periphery of the polygonal shape visible in Figure 20a.

5

Each constraining guide 10 includes a junction 72 that may be similar to those eg. on the hingeable portions of the constraining guides of Figure 14, for connection with further constraining guide portions 10 conveying goods from eg. a factory or warehouse.

10

In the embodiment shown, such constraining guides extend in parallel, and pairs of drive-transferring members 11 in the respective parallel constraining guides are interconnected by rigid rods 72 that each have suspended therefrom a goods tray 73.

15

It will be apparent that by connecting the constraining guides 10 constituting the bulk of frame 70 of the vehicle of Figure 20a, the goods trays 73 may be conveyed onto the vehicle for rotation either by means of a motor or by hand about the periphery of frame 70. This permits eg. a worker shown schematically at 74 to fill or empty the trays as desired.

20

Figure 20b shows one way in which the rods 72 may be received in the drive-transferring members 11. In Figure 20b the elongate slot 13 of the constraining guide 10 faces horizontally to receive the horizontally extending rod 72. If necessary, a detent may be employed to retain the end of the rod 72 in an aperture formed in the drive-transferring member 11 that in the embodiment shown is formed as spherical element.

25

In the Figure 20b embodiment, the portion of the rod 72 interconnecting the two drive-transferring members is dispensed with. Interconnection of

30

the drive-transferring members 11 is achieved through rigidity of the tray 73.

Figure 20a also shows a cap 76 that may be used to close the free end of the constraining guides 10 when the vehicle is moved away from the position shown. The vehicle includes wheels for this purpose.

Figures 21a and 21b show the apparatus of the invention configured as a motor 80.

10

In this embodiment, a plurality of the constraining guides 10 extend parallel to one another and are each looped about respective, spaced rollers 81, 82.

15 As shown in Figure 21b, in this embodiment slot 13 is omitted from constraining guide 10. Instead, the wall of constraining guide 10 is manufactured from an open mesh-like material that permits contact between the drive-transferring members 11 and further members exposed outside the constraining guide 10.

20

It will thus be appreciated that if roller 81 is driven eg. by means of electric motor 83, the rotation of roller 81 is transferred to linear motion of the drive-transferring members 11. Since the drive-transferring members travel from roller 81 to roller 82, as they pass over roller 82 their drive is transferred to roller 82 that is thereby caused to rotate.

25

A series of brake members 84 may be selectively brought into contact with the constraining guides 10 shown in Figure 21b. The lowermost brake member 84e may be arranged to contact only the extreme left hand constraining guide visible in Figure 21b; the next uppermost may be

30

arranged only to contact the constraining guide immediately to the right thereof, and so on, whereby on lowering the brake members downwardly in the direction of arrow B in Figure 21 the constraining guides may be successively slowed or brought to a stop. This in turn reduces the energy transferred to roller 82 in a progressive manner, thereby slowing or stopping it as desired.

The brake members 84a may be mounted on a lever or may be actuated by means of eg. a solenoid or other motor, if necessary in dependence on control signals generated in eg. a microprocessor or other controller.

Each brake member may include a brake pad 86 (best shown in Figure 21b) offset laterally from the brake pad in a neighbouring brake member whereby to dedicate a given brake member 84 to the slowing or stopping of the drive-transferring members in a predetermined constraining guide 10.

As shown in Figure 21b, the drive-transferring members 11 preferably have a rigid central zone surrounded by a deformable outer coating.

20

The mesh-like outer covering of the constraining guides 10 shown in Figures 21 may for example be supplied for safety purposes over the rods 50 of Figure 12, thereby preventing articles from becoming entrained or trapped in the constraining guide thereof. In such an arrangement, the mesh may be of a closer weave whereby to prevent access of eg. human digits to the drive-transferring members 11.

Referring now to Figure 22, there is shown a window 88 formed in a portion of a constraining guide 10 according to the invention. Window 88, which may be covered eg. by a perspex material, permits reading of

30

optical encoding information that is carried directly on the drive-transferring member 11 visible in Figure 22. Such encoding information (which may be in the form of bar codes or other optical codes) may be printed directly onto the drive-transferring member, or may be carried by  
5 eg. a sticker secured to the drive-transferring member.

The window 88 may also permit eg. the reading of a radio frequency identification tag secured to the drive-transferring member 10.

10 The readers for the bar codes and/or radio frequency or other identification tags, may if desired be enclosed within coils 25 of the constraining guide 10 as shown in Figure 8. Thus the code reading apparatus may be protected against damage and contamination, and the windows 88 may also be protected against damage. When the windows  
15 88 do not include a cover such as a sheet of perspex or glass, their positioning on the inner face of a coil such as coils 25 or 25a prevents inadvertent contact of other objects with the drive-transferring members 11. Thus the safety of the apparatus is assured.

20 Figure 23 shows an alternative design of the drive-transferring member 11 shown eg. in Figures 10. In this embodiment the rollers 37 have a roughed or serrated outer periphery, for gripping the interior of the constraining guide 10.

25 Figure 23 also shows one possible location for the radio frequency identification tag 42. As shown, the tag is located in the hub of the axle 38.

In Figure 24, there is shown an arrangement by which the bars 46 of the  
30 Figure 14a arrangement may be supported relative to the drive-transferring

members 11. As shown, each drive-transferring member 11 has projecting outwardly therefrom a cup 89 that protrudes beyond the slot 13 of constraining guide 10 in a horizontal direction. Each bar 56 has a reduced diameter portion 56a at either end that is receivable under the action of gravity in the cup 89, whereby to support the bar 56 at either end. When the drive-transferring members 11 are computer controlled, it is possible to maintain the bars 56 horizontal throughout their travel.

Any of the optional embodiments described herein in relation to Figures 1 to 24 may be employed on their own, or in conjunction with others of the optional embodiments as desired.

The components of the invention may be manufactured from a variety of materials, as appropriate. For example, the components may be manufactured from materials suitable for use in different industries such as the food industry, chemical processing industry and the pharmaceutical industry. Corrosion free (eg. non-metallic) materials may be employed as appropriate.

The constraining guides 10 may be manufactured from flexible materials or rigid material as desired.

Self-lubricating materials may also be used as appropriate. For example, sintered materials that dispense lubricants as they wear may be employed for the interior of the constraining guide 10 and, optionally, for the drive-transferring members 11.

The windows 88 may also be used to indicate the completion of actions eg. in process plant. For example, the presence of an encoded drive-transferring member in a chosen window 88 may indicate the the lapsing

of a predetermined amount of time from the completion of a previous process, by virtue of travel of the drive-transferring members 11 a predetermined distance along the constraining guides 10.

- 5   Reservoirs for receiving drive-transferring members 11 from and supplying drive-transferring members 11 to the constraining guides 10 may be operatively connected to the constraining guides 10 at suitable locations, as desired. In the case of the vehicles of Figures 14, the reservoirs may be located eg. under the floor of the vehicle, where there  
10   is conventionally a significant "dead" space.

**CLAIMS**

1. A drive-transferring apparatus, comprising:  
a first constraining guide defining a drive-transfer path; and  
5 a plurality of drive-transferring members movably captive in the  
constraining guide, wherein:  
(i) the first constraining guide includes one or more apertures  
permitting engagement of one or more of the drive-transferring members  
with one or more further members in a drive-transferring manner; and  
10 (ii) the drive-transferring members are capable of transferring  
drive between discrete parts of the constraining guide by means of  
compressive interconnection.
2. A drive-transferring apparatus according to Claim 1 wherein the  
15 first constraining guide defines an endless loop.
3. A drive-transferring apparatus according to Claim 1 or Claim 2  
wherein the first constraining guide is elongate.
- 20 4. An apparatus according to Claim 3 wherein the or an aperture in  
the first constraining guide is elongate and generally parallel to the axis of  
elongation of the first constraining guide.
5. An apparatus according to Claim 4 wherein the first constraining  
25 guide is a channel-section member.
6. An apparatus according to any preceding claim wherein a plurality  
of the drive-transferring members are substantially contiguous with one  
another in the first constraining guide when the apparatus is at rest.



7. An apparatus according to Claim 6 wherein the said plurality of drive-transferring members form a substantially contiguous line of such members in the constraining guide.
- 5 8. An apparatus according to any preceding claim wherein each drive-transferring member carries encoded data.
9. An apparatus according to Claim 8 wherein each drive-transferring member includes an optical code.
- 10 10. An apparatus according to Claim 9 wherein the optical code is a bar code.
11. An apparatus according to Claim 9 or Claim 10 wherein the bar  
15 code is secured on the drive-transferring member.
12. An apparatus according to any of Claims 8 to 11 wherein the constraining guide includes an opening permitting detection of the optical code.
- 20 13. An apparatus according to any of Claims 8 to 12 wherein the drive-transferring member includes a further member supporting the encoded data.
- 25 14. An apparatus according to Claim 13 wherein the further member is detachably secured to the drive-transferring member.
15. An apparatus according to any preceding claim wherein each drive-transferring member is of a shape generally complementary to the cross-  
30 sectional shape of the first constraining guide, whereby to facilitate

movement of the drive-transferring members in the first constraining guide.

16. An apparatus according to Claim 15, wherein the drive-transferring  
5 members are generally spherical or spheroidal.

17. An apparatus according to any preceding claim wherein one or  
more of the drive-transferring members is engageable, via the or an  
aperture in the first constraining guide, with one or more further members  
10 whereby to cause motion of the further member.

18. An apparatus according to Claim 17, wherein one or more of the  
drive-transferring members includes a detent, accessible via the or an  
aperture in the first constraining guide, for a said further member.  
15

19. An apparatus according to Claim 17 or Claim 18, wherein the or  
a said further member is a rod or hanger capable of supporting goods for  
transportation on the apparatus.

20. An apparatus according to any of Claims 17 to 19, including a  
support, for one or more said further members, including a moveable  
member for engaging a said further member and a said drive-transferring  
member.

21. An apparatus according to Claim 20 wherein the moveable member  
is resiliently biased towards the said constraining guide, whereby to  
engage a said further member and a said drive-transferring member, the  
apparatus including a controllable detent for retaining the moveable  
member selectively to maintain mutual separation of the moveable member  
30 and the drive-transferring member.

22. An apparatus according to Claim 20 or Claim 21 wherein the support includes means for supporting a plurality of said further members, and means for selectively engaging one or more said further members and the moveable member with one another.

5

23. An apparatus according to any preceding claim including a source of lubricant for the drive-transferring members.

24. An apparatus according to Claim 23 wherein the constraining guide  
10 includes a lubricant reservoir disposed such that a plurality of the drive-transferring members contact lubricant therein during motion in the first constraining guide.

25. An apparatus according to Claim 24 wherein the lubricant reservoir  
15 lies at a lower level than the adjoining lengths of the first constraining guide, the lubricant being a liquid in the reservoir and the drive-transferring members passing through the reservoir descending into the liquid lubricant from one of the said adjoining portions.

20 26. An apparatus according to any preceding claim including a drive for the drive-transferring members.

27. An apparatus according to Claim 26 wherein the drive includes a  
25 powered member capable of imparting motion to a plurality of the drive-transferring members in succession.

28. An apparatus according to Claim 27 wherein the powered member protrudes via an aperture in the first constraining guide to drivingly contact the drive-transferring members.

29. An apparatus according to Claim 27 or Claim 28 wherein the powered member includes a drivingly rotatable star wheel having points engageable with the drive-transferring members.
- 5 30. An apparatus according to Claim 27 or Claim 28 wherein the powered member includes a toothed sprocket drivingly engageable with the drive-transferring members.
31. An apparatus according to any of Claims 26 to 30 including a  
10 plurality of said drives.
32. An apparatus according to any preceding claim, wherein the constraining guide is branched.
- 15 33. An apparatus according to Claim 32 including one or more moveable barriers for controlling movement of the drive-transferring members at a said branch.
- 20 34. An apparatus according to Claim 33 wherein the or a said moveable barrier includes a member secured on the constraining guide and moveable between a first position preventing entry of the drive-transferring members into a branch of the constraining guide; and a second position permitting entry of the drive-transferring members into the said branch.
- 25 35. An apparatus according to Claim 34 wherein when occupying its second position the member prevents entry of the drive-transferring members into a second branch of the constraining guide.
- 30 36. An apparatus according to any of Claims 32 to 35 including a motor for powering operation of the moveable barrier.

37. An apparatus according to Claim 36 including a controller for controlling movement of the moveable barrier.
38. An apparatus according to Claim 37 including a code reader and  
5 wherein the drive-transferring members are encoded in a manner readable by the code reader, operation of the moveable barrier depending on the coding of drive-transferring members read by the code reader.
39. An apparatus according to Claim 38 wherein the code reader is a  
10 bar code reader, a detector of audible, magnetic or optical code signals, or a radio frequency code reader.
40. An apparatus according to any preceding claim including one or more sources of drive-transferring members for adding drive-transferring  
15 members to the constraining guide.
41. An apparatus according to Claim 40 wherein the or a said source of drive-transferring members comprises a further constraining guide supporting one or more drive-transferring members in an interior portion  
20 communicating with the interior of said first constraining guide.
42. An apparatus according to any preceding claim wherein the first constraining guide includes one or more apertures permitting removal of drive-transferring members from the constraining guide.  
25
43. An apparatus according to Claim 42 wherein the or each aperture permitting removal of drive-transferring members is closeable.
44. An apparatus according to Claim 43 wherein the or each closeable  
30 aperture lies in the path of drive-transferring members in the first

constraining guide.

45. An apparatus according to any of Claims 42 to 44 including a further constraining guide connected to the said aperture for removal of  
5 drive-transferring members.

46. An apparatus according to any of Claims 43 to 45 including a receptacle for drive-transferring members removed from the constraining guide.

10

47. An apparatus according to any preceding claim including a detector of fracturing of a drive-transferring member.

48. An apparatus according to Claim 47 wherein the detector is  
15 operatively connected to open and close a closeable aperture in the first constraining guide, thereby permitting controlled removal of fractured drive-transferring means from the first constraining guide.

49. An apparatus according to any preceding claim, wherein at least a  
20 portion of the constraining guide is rigid.

50. An apparatus according to any preceding claim, wherein at least a portion of the constraining guide is flexible.

25 51. A constraining guide for an apparatus according to any preceding claim, comprising three or more parallel rods spaced from one another and supported on one or more supports, the pattern of the rods defining a recess for moveable retention therein of a drive-transferring member.

30 52. A constraining guide according to Claim 51 including an enclosure

for the rods.

53. A constraining guide according to Claim 52 wherein the enclosure includes an aperture communicating between the interior and exterior of the constraining guide.

54. A constraining guide according to any of Claims 51 to 53 wherein the rods are flexible.

10 55. A constraining guide for an apparatus according to any of Claims 1 to 50, comprising an elongate tube of a first material surrounded by further elongate tube of a protective material, the said tubes having mutually aligned, respective slots formed therein.

15 56. A constraining guide according to Claim 55 wherein the material of the first, elongate tube and a drive-transferring member of the apparatus have a coefficient of friction of less than 0.5.

20 57. A three dimensional array of interconnected, drive-transferring apparatuses each according to any of Claims 1 to 50.

58. A three dimensional array according to Claim 57 including a controller for controlling operation of a powered member capable of imparting motion to a plurality of the drive-transferring members.

25

59. A three dimensional array according to Claim 58 including a plurality of switchable junctions between branched constraining guide portions, the controller controlling operation of the switchable junctions to cause selective directing of the drive-transferring members about the said array.

30

60. An array according to Claim 59 wherein the constraining guides including one or more inlets and/or one or more outlets for drive-transferring members.
- 5 61. An array according to Claim 60 or any claim dependent therefrom, wherein one or more said inlets or outlets is operatively connectable to a further constraining guide.
62. A building generally enclosing an array according to any of Claims  
10 57 to 61.
63. A building according to Claim 62 wherein the array is according to Claim 60 and one or more said inlets and/or outlets terminates at a vehicle loading bay.  
15
64. A vehicle generally enclosing an array according to any of Claims 57 to 61.
65. A vehicle according to Claim 64 wherein a constraining guide  
20 portion is hingeable or otherwise moveable relative to the remainder of the array, the constraining guide portion being operatively connectable to the remainder of the array.
66. A vehicle according to Claim 65 wherein the array is according to  
25 Claim 60, the said constraining guide portion including one or more said inlets and/or outlets.
67. A vehicle according to any of Claims 64 to 66 wherein the said  
30 constraining guide portion is secured to a hingeably mounted door of the vehicle.



68. A vehicle according to any of Claims 65 to 67 including a pair of said hingeable constraining guide portions, the said pair of portions each being hingeable from a first position substantially flush with the remainder of the array and a further position protruding therefrom, the constraining  
5 guide portions in their second positions lying opposite one another for supporting an elongate member secured to respective drive-transferring members in the respective constraining guide portions, whereby the pair of constraining guide portions define a hoist for the elongate member.

10 69. A drive-transferring member of an apparatus, array, building or vehicle according to any preceding claim, including a radio frequency identification transmitter.

70. A drive-transferring member according to Claim 69 wherein the  
15 radio frequency identification transmitter is supported on an axle of the drive-transferring member.

71. An apparatus according to any of Claims 1 to 50, comprising a source of encoded said drive-transferring members, the source including  
20 means for releasing and/or receiving the drive-transferring members into a said constraining guide in dependence on the coding of the drive-transferring members.

72. An apparatus according to Claim 71 wherein the source includes a  
25 sub-divided reservoir, each sub-division thereof containing one or more drive-transferring members encoded in a predetermined manner; and selectively openable gate means for releasing drive-transferring members from the sub-divisions.

30 73. A conveyor comprising a plurality of pivotably interlinked support

members supported at spaced locations on respective pairs of spaced constraining guides of an apparatus according to any of Claims 1 to 50.

74. A conveyor according to Claim 73 wherein the said constraining guides follow respective, generally concentric, spaced curves thereby permitting the conveyor to follow a curved path, the longer of the constraining guides in the vicinity of the path including means for adding thereto and removing therefrom drive-transferring members.
75. A conveyor according to Claim 73 or Claim 74 wherein the length of each support member is adjustable.
76. A conveyor according to Claim 75 wherein each support member comprises a pair of sub-members one of which is hollow for moveably receiving the other said sub member.
77. A conveyor according to Claim 76 including a resiliently deformable member interconnecting the sub-members.
78. An apparatus according to any of Claims 1 to 50 including a horizontal array of the said constraining guides operatively interconnected in a grid pattern.
79. A support comprising a base member including a plurality of engaging members secured thereon selectively projectable therefrom for engaging a selected plurality of drive-transferring members in an horizontal array of an apparatus according to Claim 78.
80. A motor including a drive-transferring apparatus according to any of Claims 1 to 50 and extending about the periphery of a rotatable

member, the constraining guide of the drive-transferring apparatus being perforated to permit engagement between the drive-transferring members thereof and the rotatable member, thereby causing powered rotation of the rotatable member on moving of the drive-transferring members.

5

81. A motor according to Claim 80 comprising a plurality of said drive-transferring apparatuses extending about the periphery of the rotatable member.

10 82. A motor according to Claim 81 including one or more brake members acting via perforations in the respective constraining guides on drive-transferring members in the drive-transferring apparatuses, thereby varying the speed of the rotatable member.

15 83. A drive-transferring member for use in an apparatus according to any of Claims 1 to 50, the drive-transferring member including one or more members shaped for rolling motion in a said constraining guide.

20 84. A drive-transferring member according to Claim 83 including a pair of rollers secured on a common shaft protruding on either side of a support member, whereby the rollers are rotatable relative to the support member such that on movement of the drive-transferring member in a said constraining guide the rollers rotatingly engage the constraining guide and the support member occupies a substantially constant orientation.

25

85. A drive-transferring member according to Claim 83 or Claim 84, including a portion for protruding via an aperture in a said constraining guide.

30 86. A drive-transferring member according to Claim 84 wherein the

said portion carries encoded data.

87. A drive-transferring member according to Claim 85 or Claim 86 wherein the said portion includes a detachably secured part.

5

88. A drive-transferring member according to any of Claims 85 to 87 wherein the said portion includes means for supporting a further member.




89. Apparatuses generally as herein described, with reference to and/or as illustrated in the accompanying drawings.

10

90. A method of transferring drive comprising imparting motion to one or more of a plurality of drive-transferring members loosely captive in a constraining guide, whereby to cause compressive interconnection of a plurality of said drive-transferring members and thereby transfer drive in the constraining guide.

15

91. Methods generally as herein described, with reference to and/or as illustrated in the accompanying drawings.

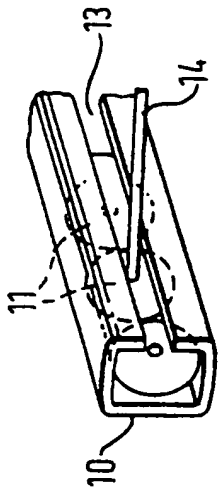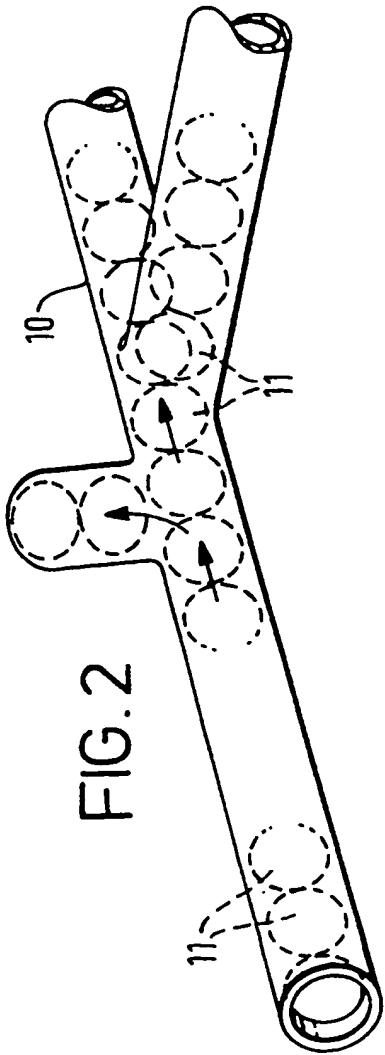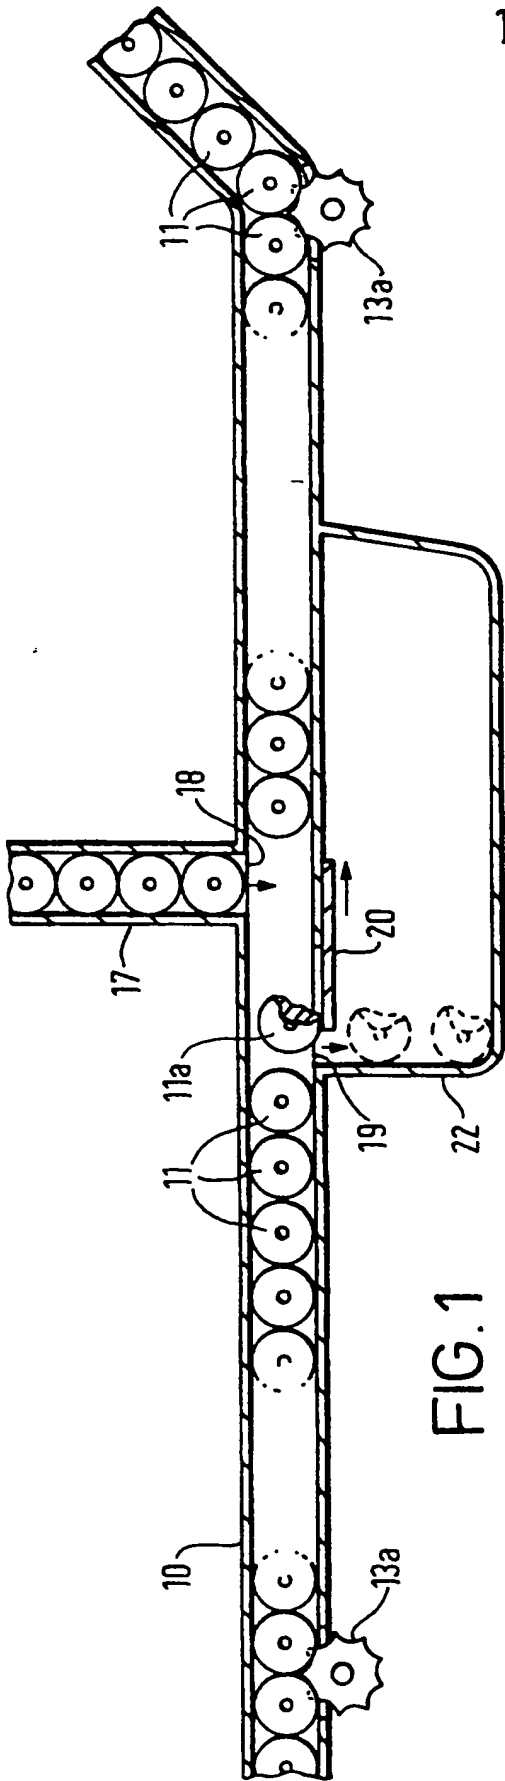

2/19

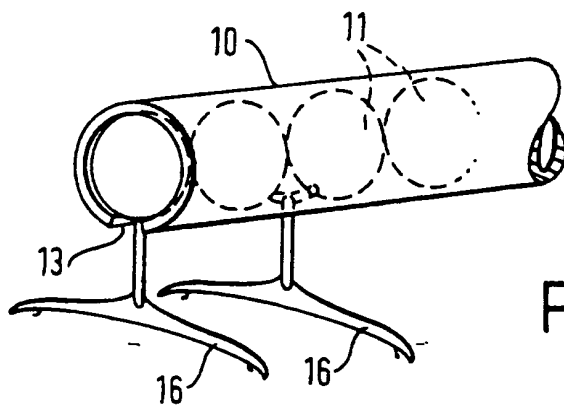


FIG. 4

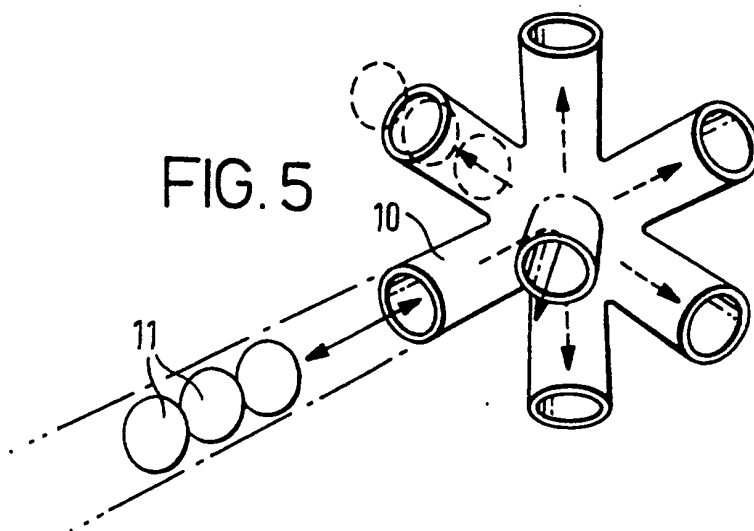


FIG. 5

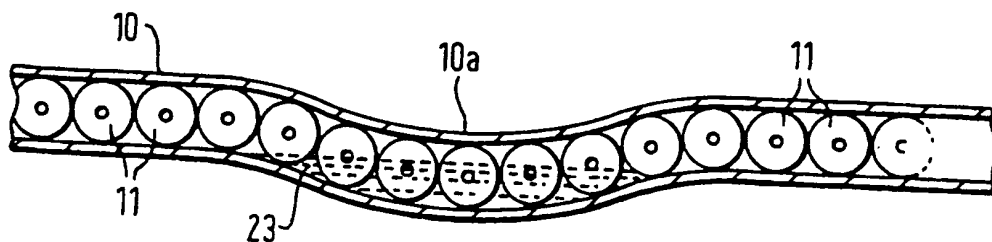


FIG. 6

3 / 19


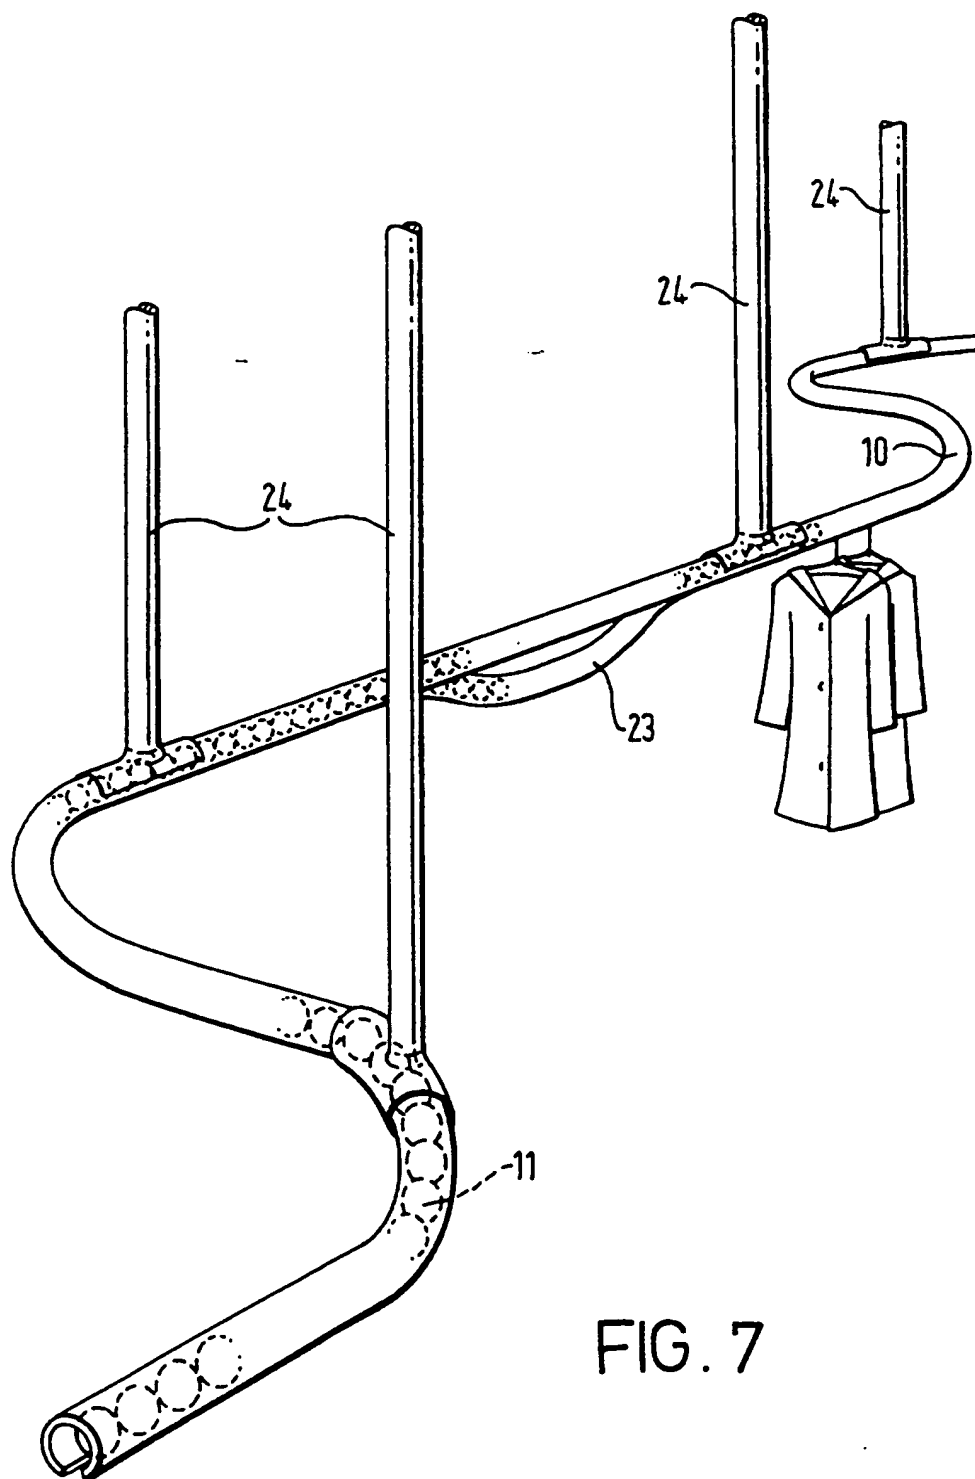



FIG. 7






8  
G.  
F

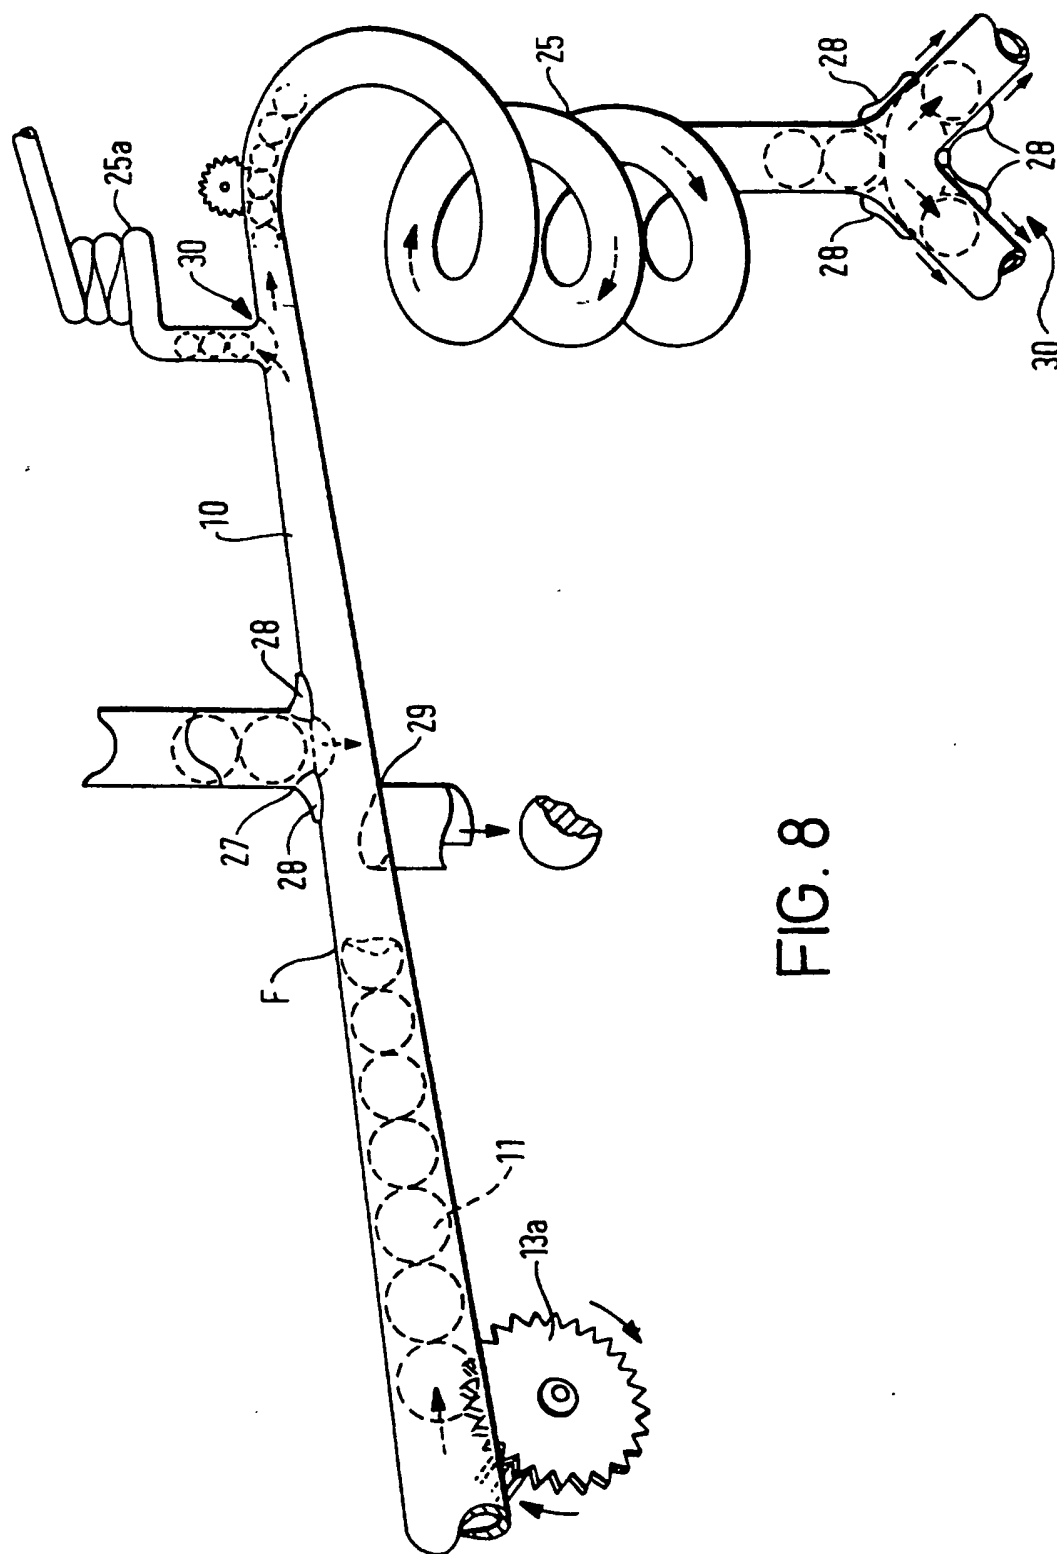

5/19

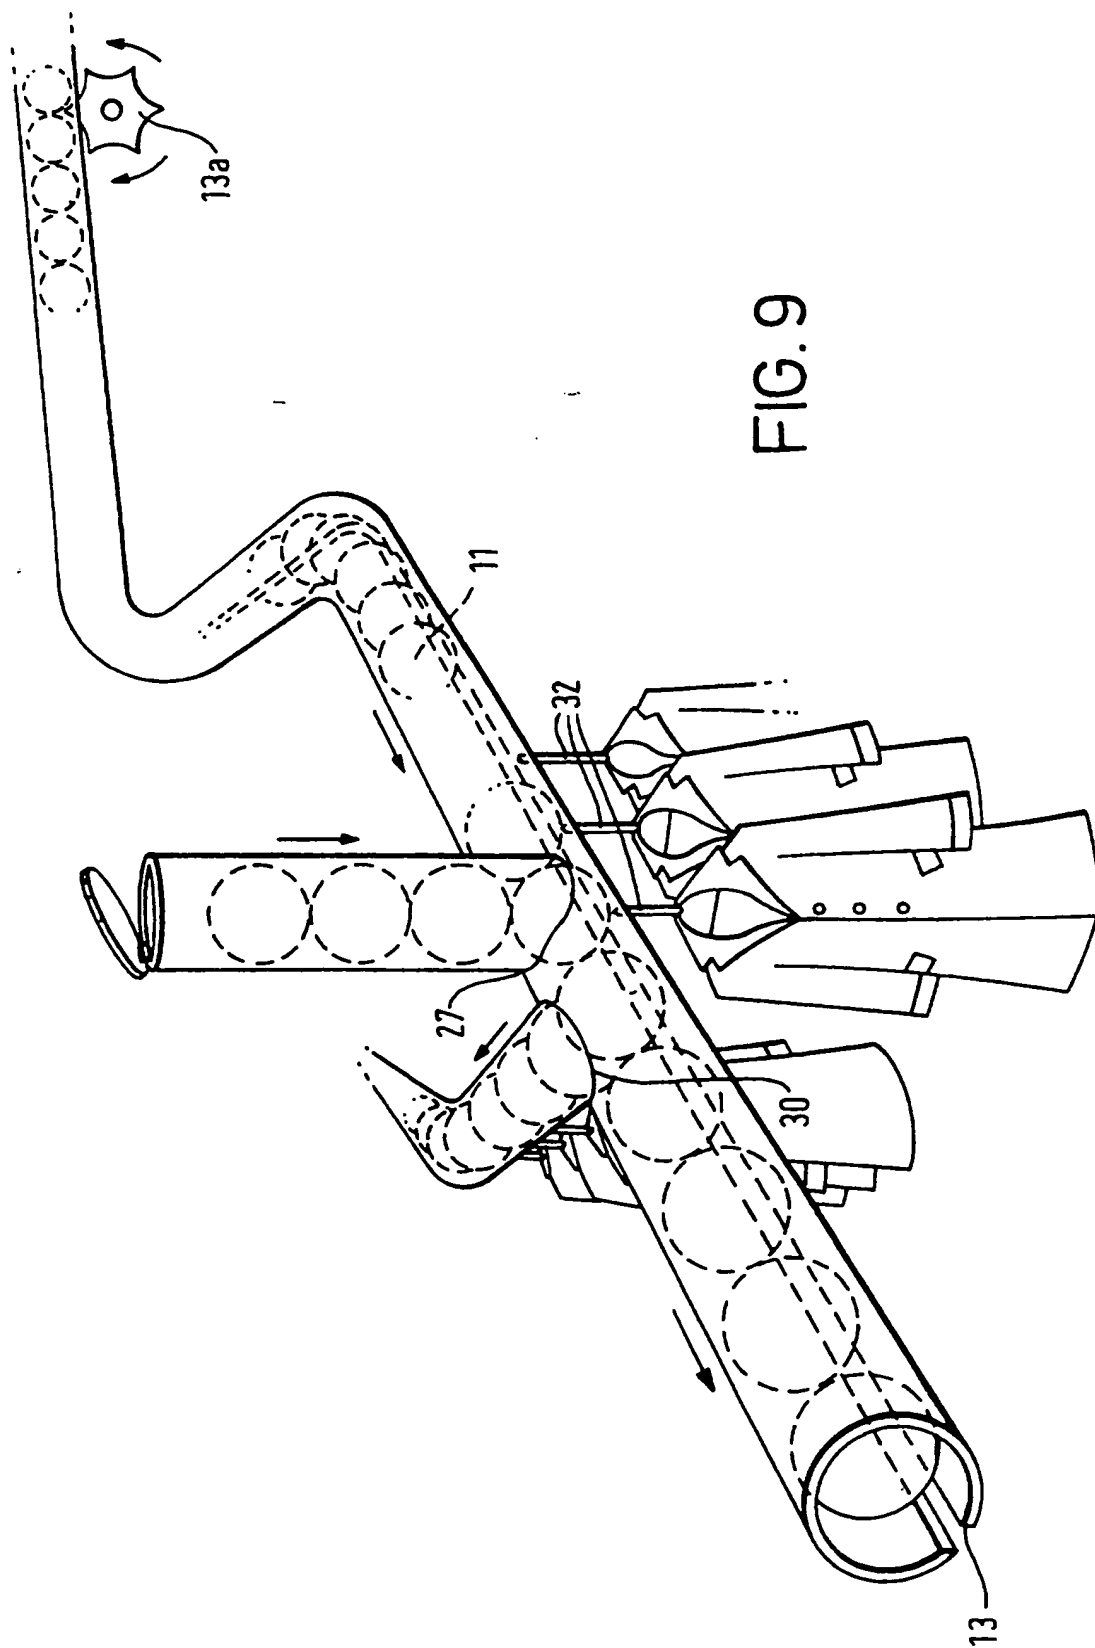

6 / 19

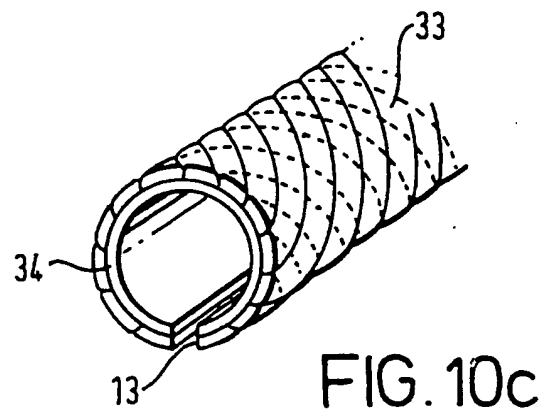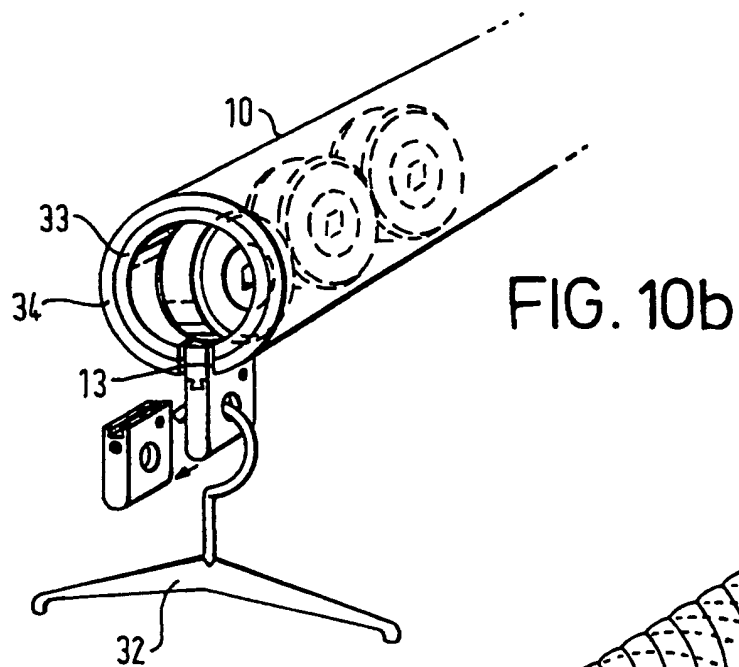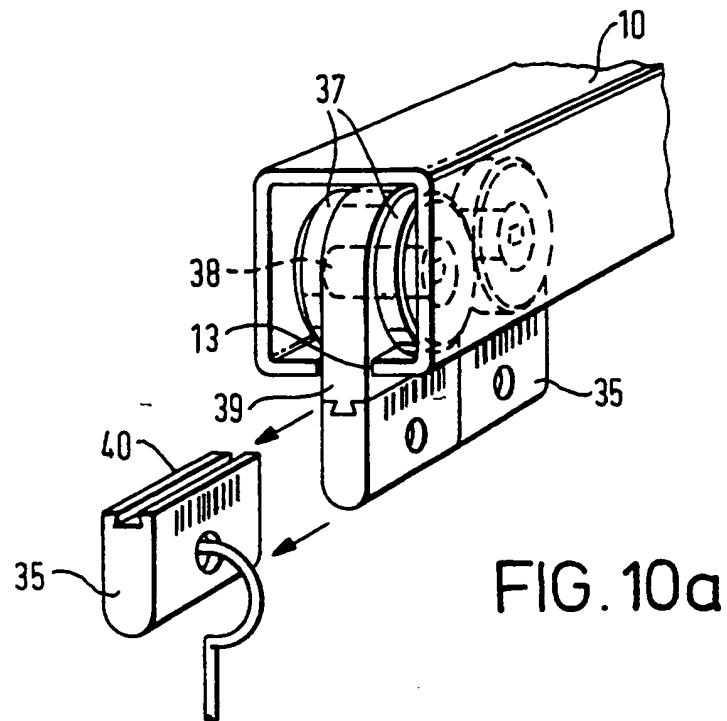

7/19

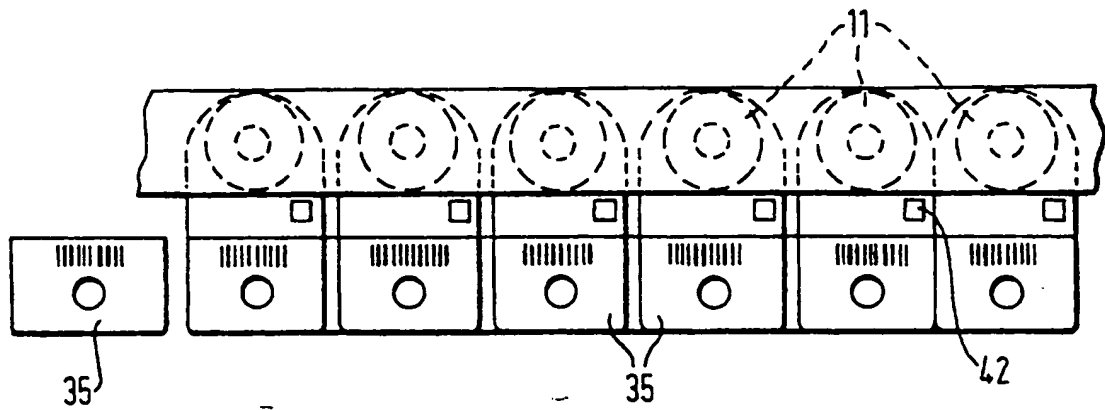


FIG. 10d

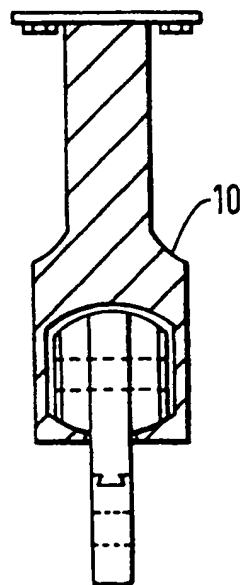


FIG. 10e

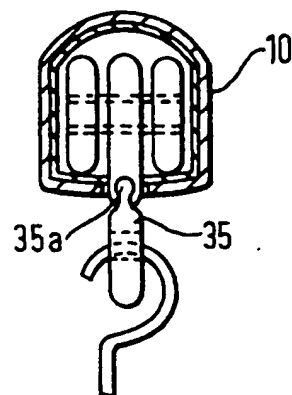


FIG. 10f

8/19

FIG. 11

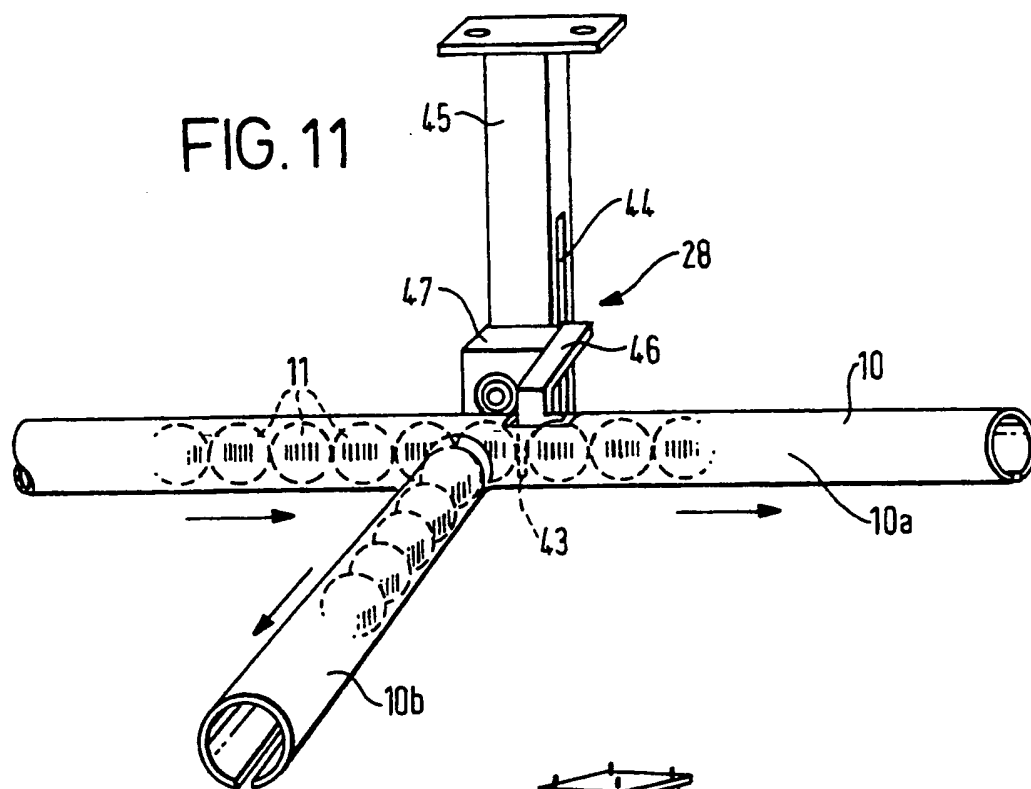


FIG. 12a


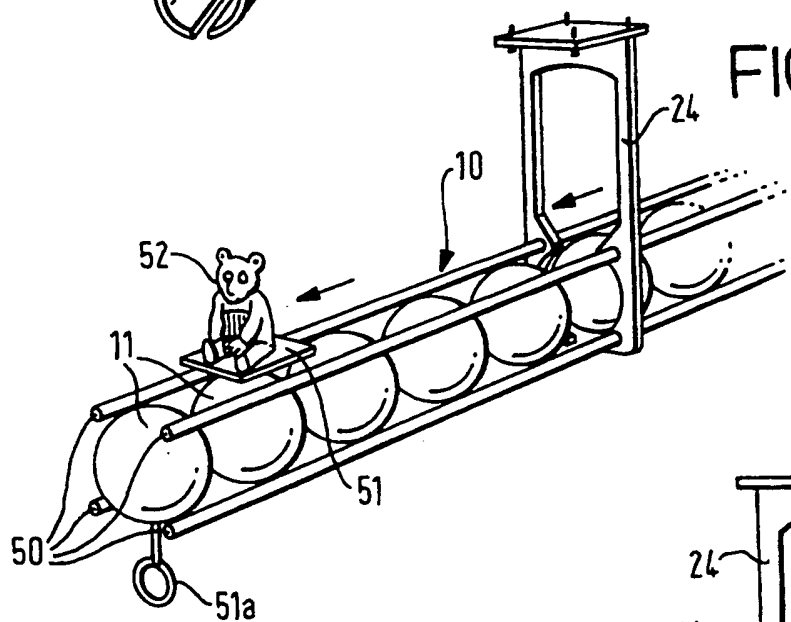


FIG. 12b

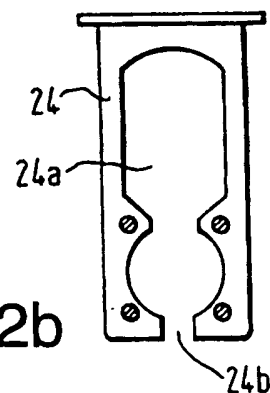

9 / 19

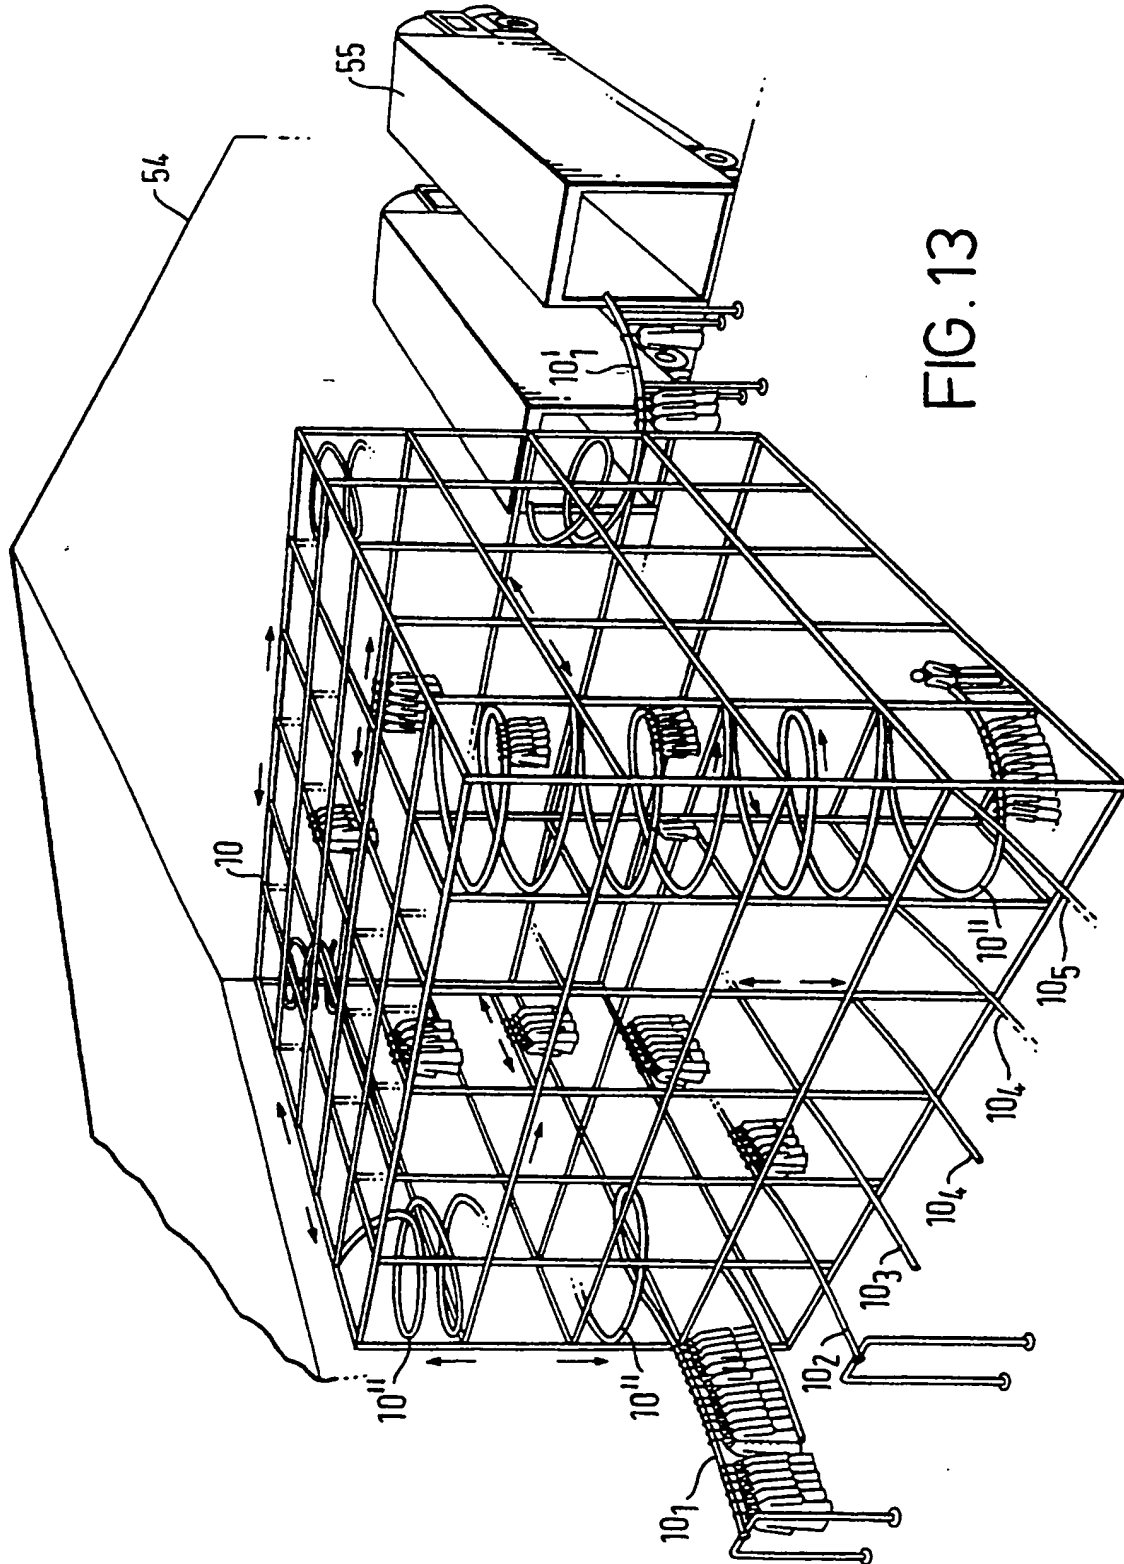


FIG. 13


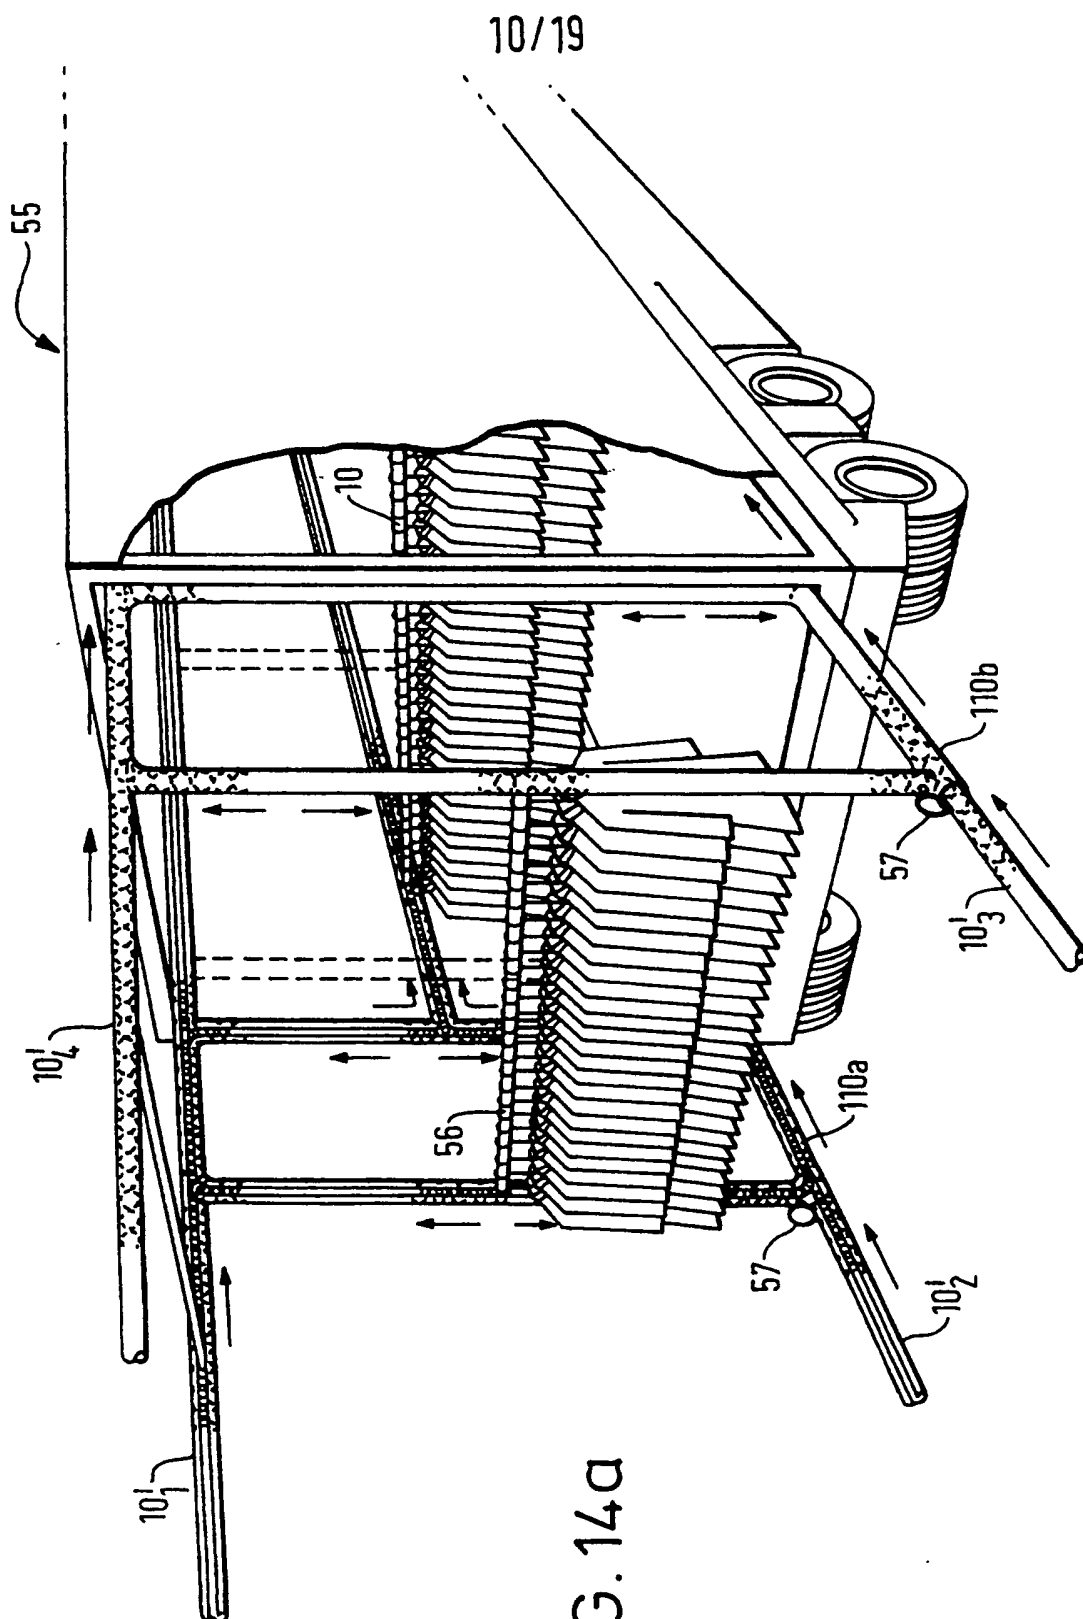


FIG. 14a


11/19

FIG. 14b

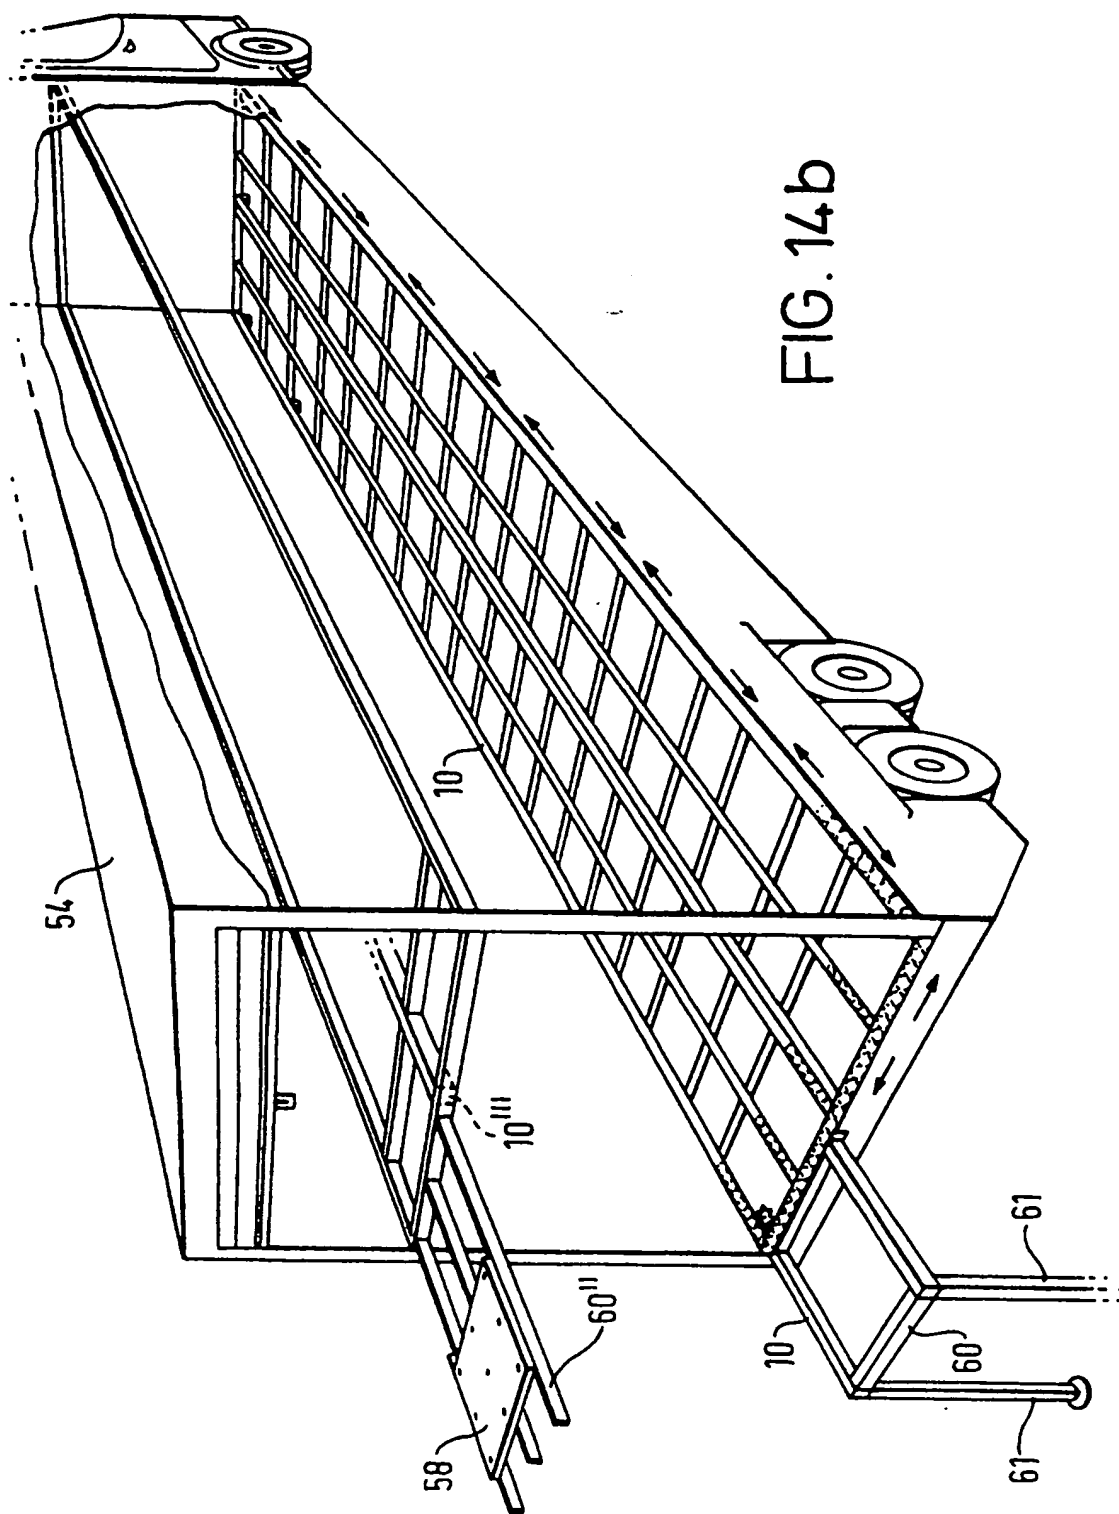


12/19

FIG. 14c

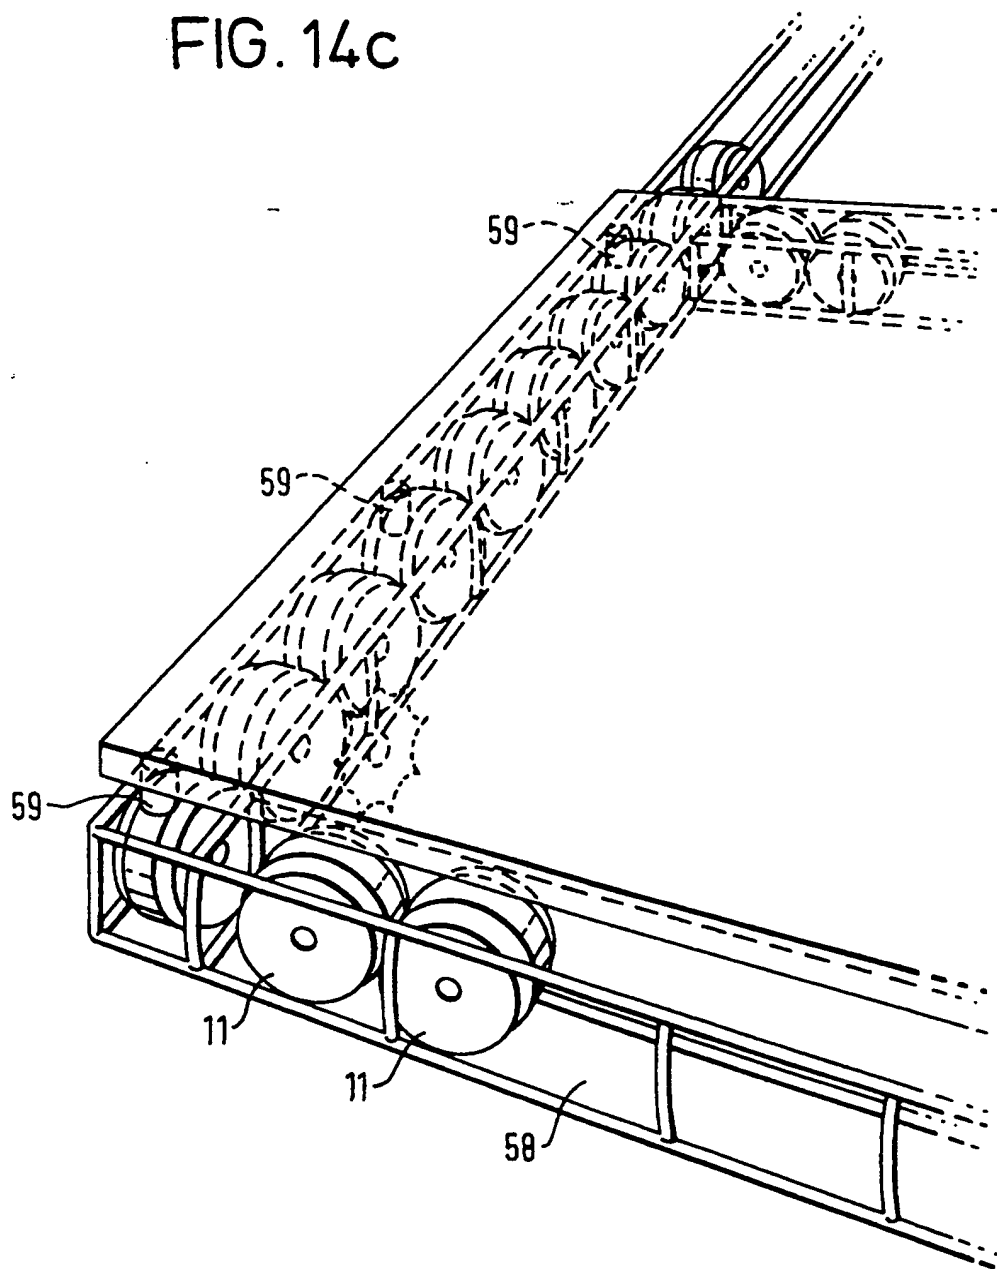



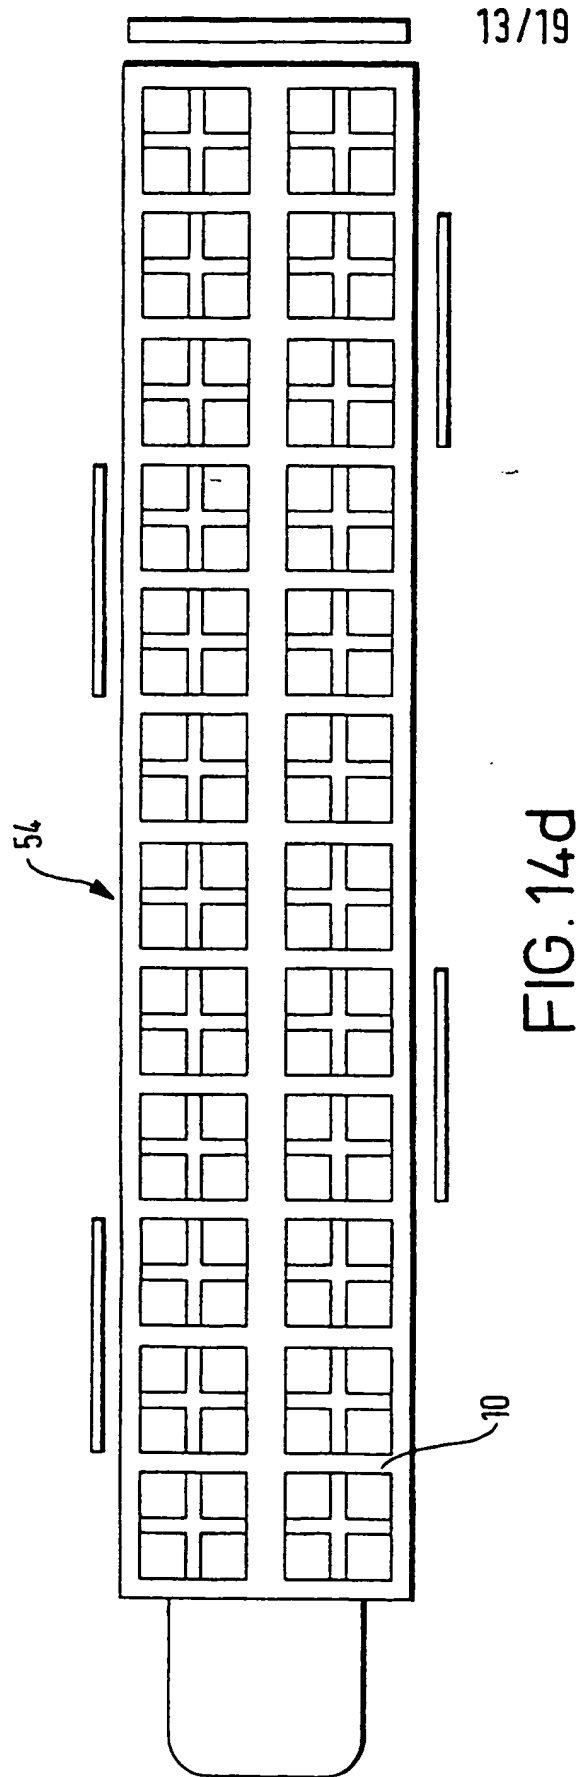

14/19

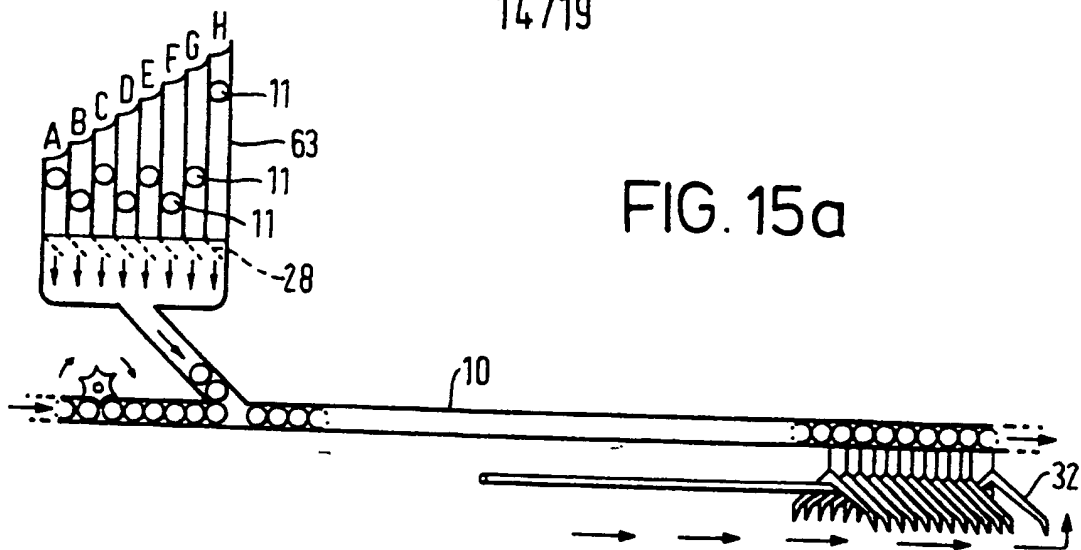


FIG. 15a

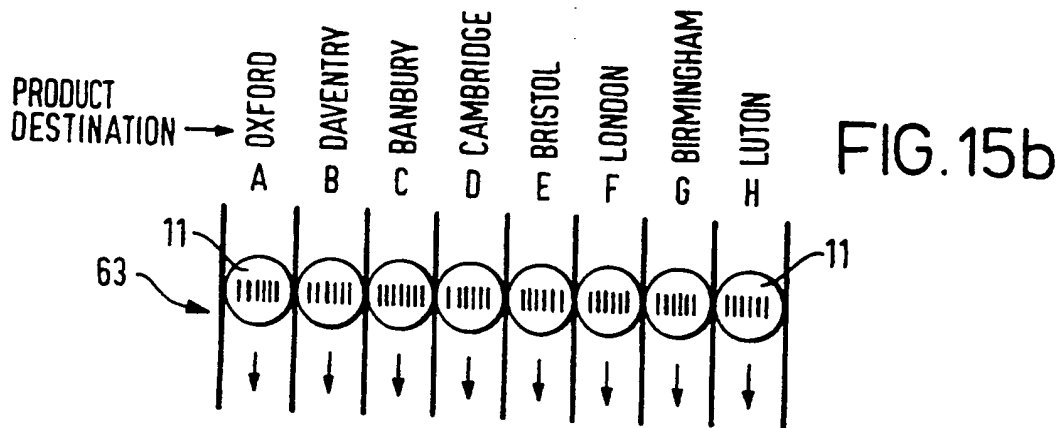


FIG. 15b

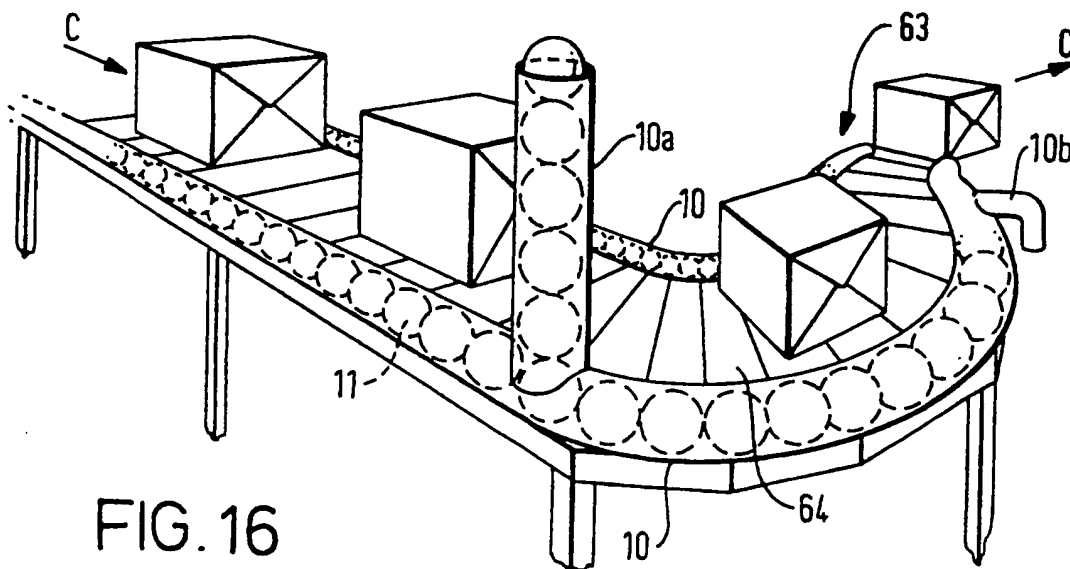


FIG. 16

15/19

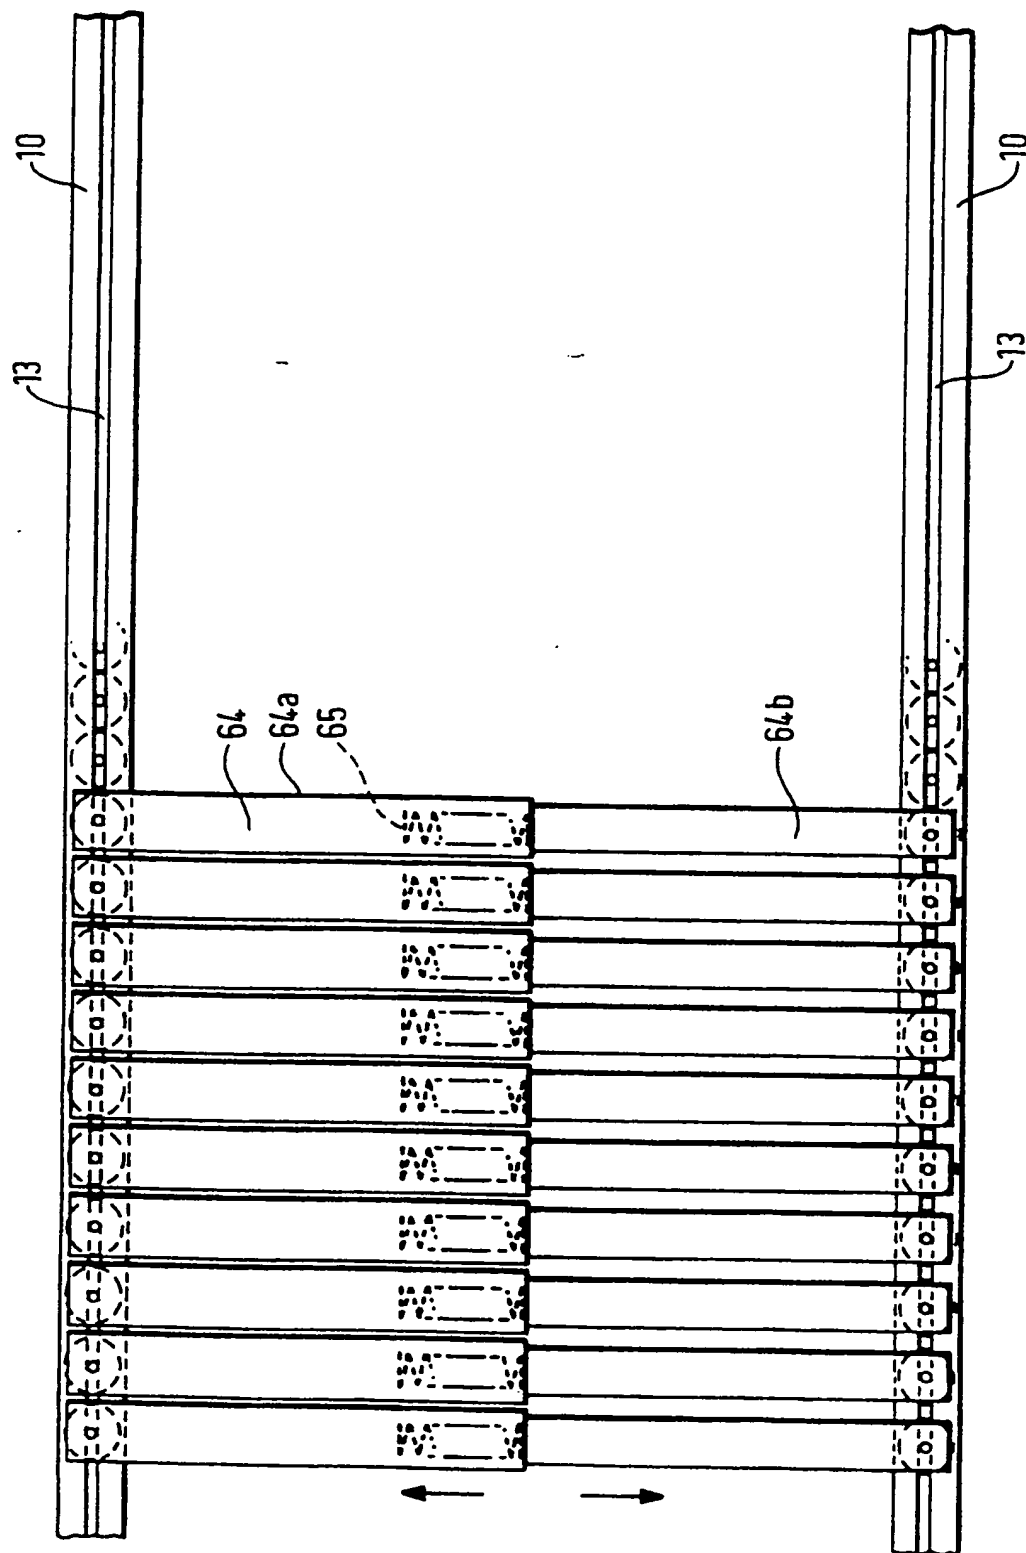


FIG. 17

16/19

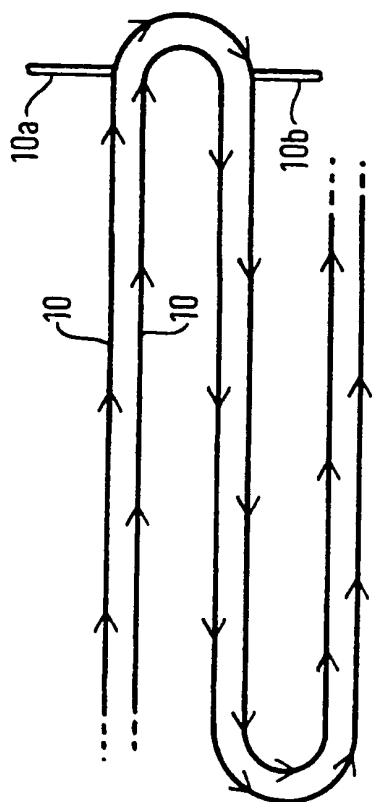


FIG. 18

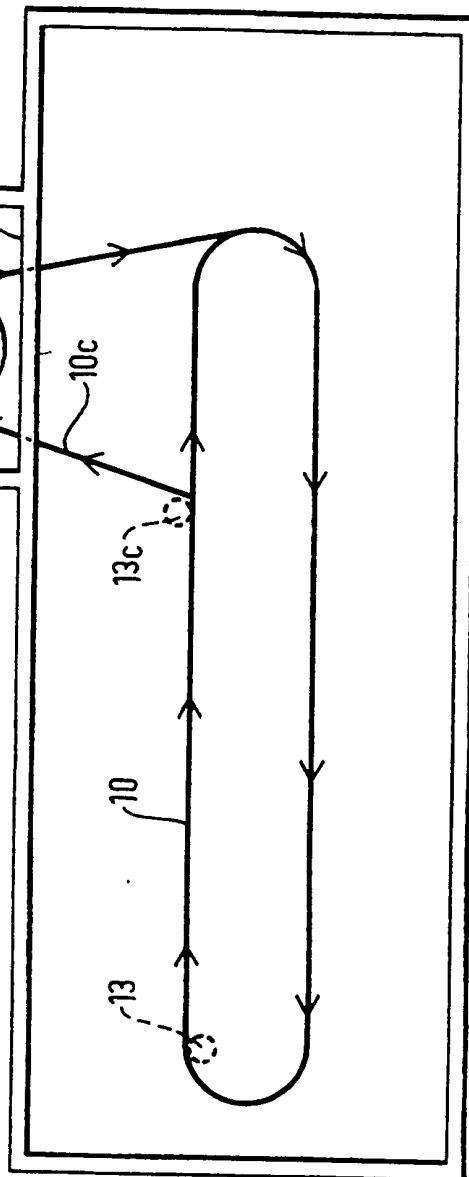


FIG. 19

17/19

FIG. 20a


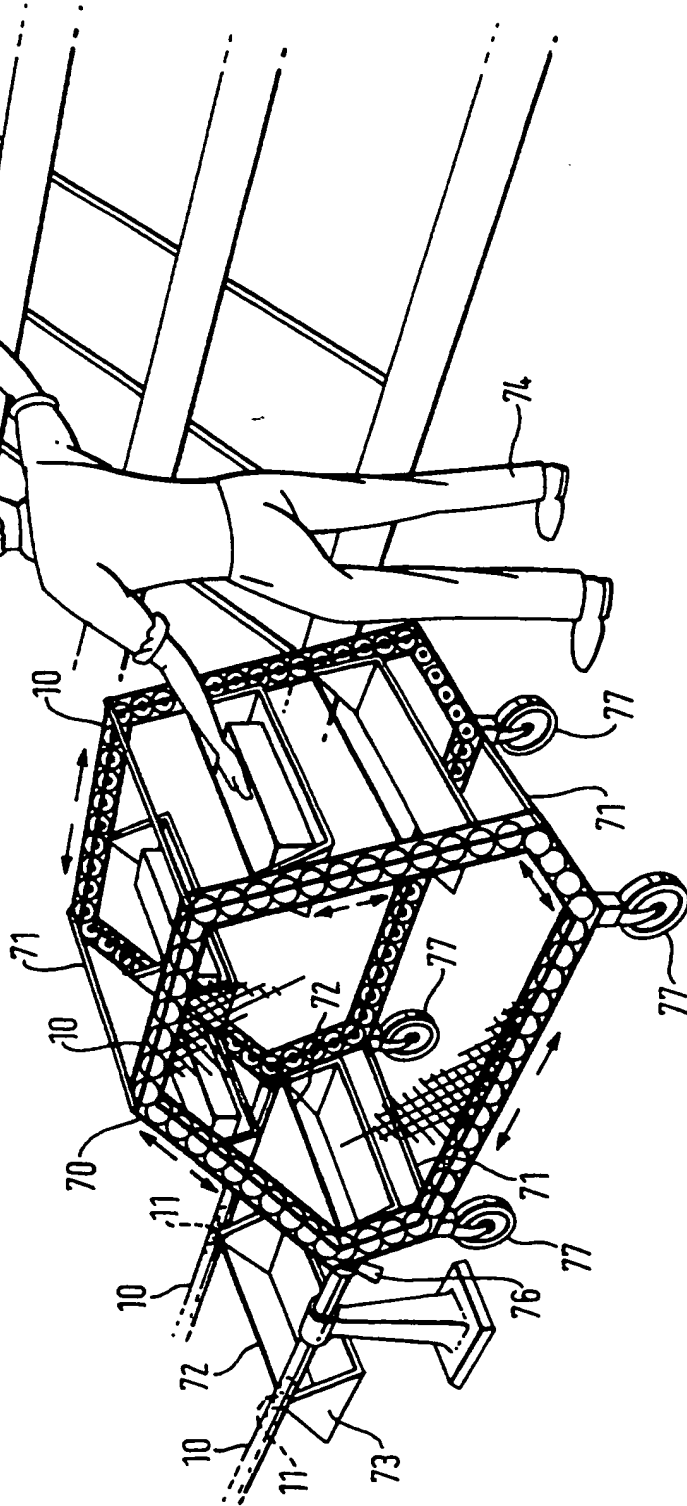


FIG. 20b

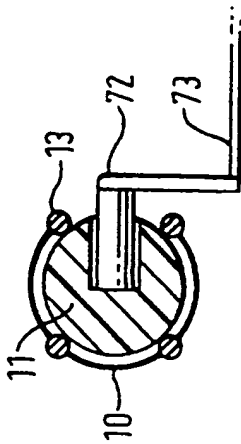

18/19

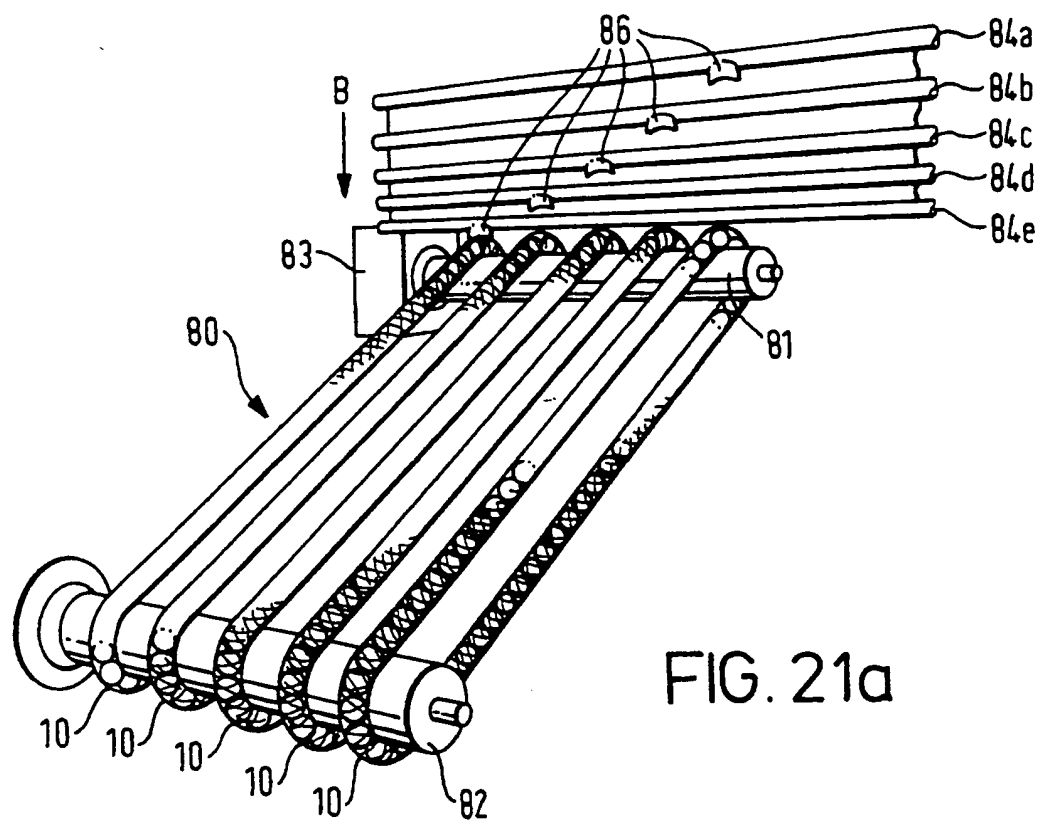


FIG. 21a




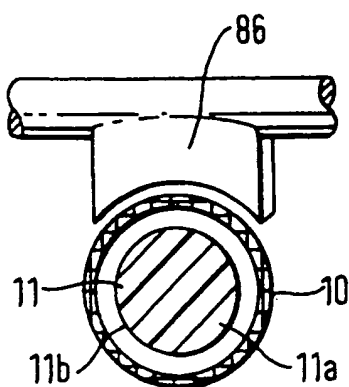


FIG. 21b

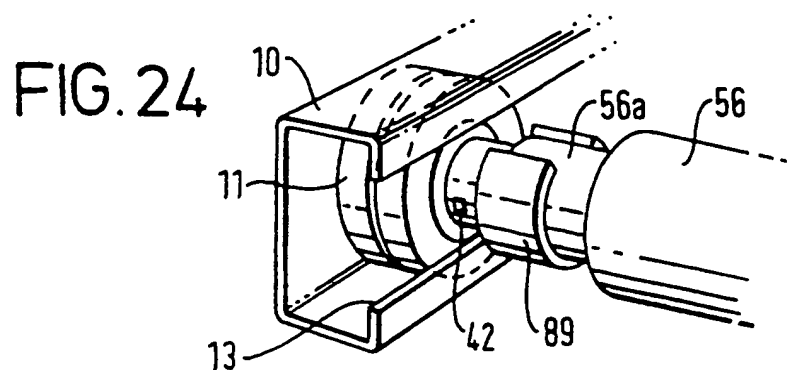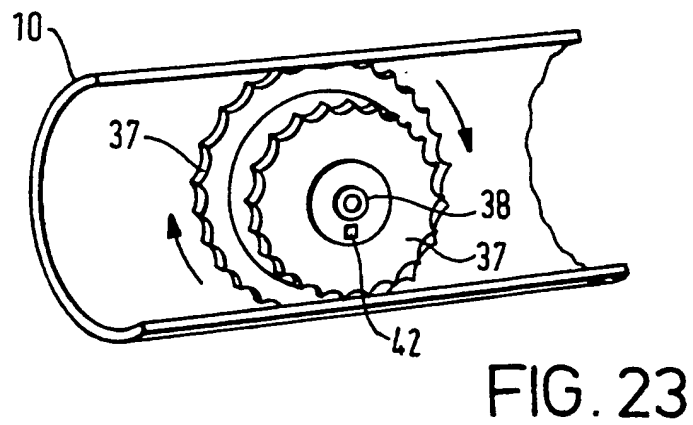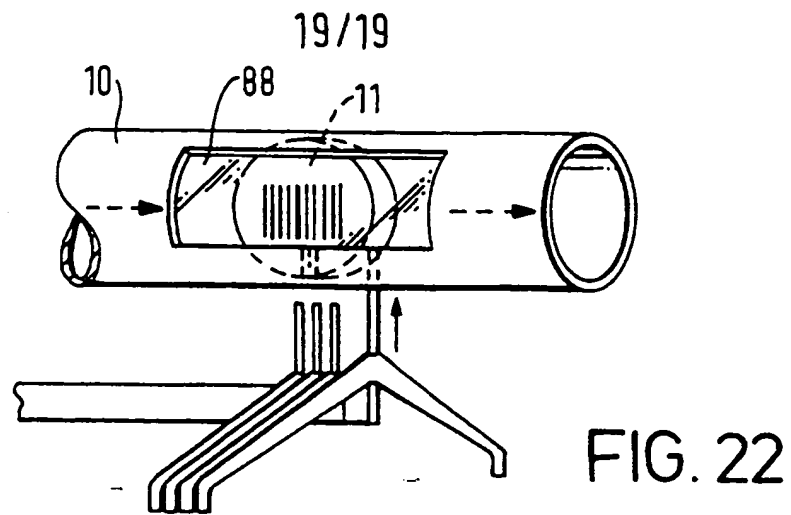

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 97/01081

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 B65G35/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 B65G F16H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	BE 629 093 A (COMMISSARIAT A L'ENERGIE ATOMIQUE) 1 July 1963  see the whole document --- -/-	1-7, 15-17, 19,20, 22, 26-35, 40-42, 45,49, 57-59, 64-68, 73-75, 80, 83-85, 87-91

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\* & \* document member of the same patent family

Date of the actual completion of the international search

12 September 1997

Date of mailing of the international search report

19. 09. 97

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Beernaert, J



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 97/01081

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>FR 2 551 166 A (FERAMATIC AG) 1 March 1985</p> <p>see the whole document -----</p>	<p>1-7, 15-17, 26-31, 49,50, 73,74, 80,81</p>

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 97/01081

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
BE 629093 A		NONE	
FR 2551166 A	01-03-85	CH 665691 A	31-05-88
		AT 398463 B	27-12-94
		AT 257984 A	15-04-94
		AU 573609 B	16-06-88
		AU 3174184 A	28-02-85
		BR 8404171 A	16-07-85
		CA 1216176 A	06-01-87
		CS 8406361 A	14-05-87
		DE 3428963 A	14-03-85
		GB 2148443 A,B	30-05-85
		HK 83587 A	20-11-87
		NL 8402494 A,C	18-03-85
		SE 457984 B	13-02-89
		SE 8404149 A	23-02-85
		SU 1477254 A	30-04-89
		US 4856644 A	15-08-89
		BE 900378 A	17-12-84
		JP 60057042 A	02-04-85